



MASTER PL-T 4 Pin

MASTER PL-T 57W/827/4P 1CT

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	GX24q-5
Cap-Base Information	4P
Life to 50% fail	13000 hr
Preheat EL,3h	
Life to 50% fail	7000 hr
Nonpreh EL,3h	
Life to 10% fail	4500 hr
Nonpreh EL,3h	
Life to 10% fail	8000 hr
Preheat EL,3h	
LSF HF Preheat	60 %
12000h Rated,3h	
LSF HF Preheat	90 %
8000h Rated,3h	
LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

• Light Technical Characteristics

Color Code	827 [CCT of 2700K]
Color Rendering Index	82 Ra8
Color Designation (text)	Incandescent White
Color Temperature	2700 K
Chromaticity Coordinate X	455 -
Chromaticity Coordinate Y	417 -
Lum Efficacy Rated HF 25°C	75 (min) Lm/W

LLMF HF 12000h	81 %
Rated	
LLMF HF 8000h	84 %
Rated	
LLMF HF 6000h	86 %
Rated	
LLMF HF 4000h	88 %
Rated	
LLMF HF 2000h	92 %
Rated	
Luminous Flux EL 25°C, Rated	4200 Lm
Luminous Flux EL 25°C, Nominal	4300 Lm
Design Temperature	28 C

• Electrical Characteristics

Lamp Wattage	57 W
Lamp Voltage EL 25°C	160 V
Lamp Current EL 25°C	0.325 A
Dimmable	Yes
Lamp Wattage EL 25°C, Rated	56.0 W
Lamp Wattage EL 25°C, Nominal	57 W

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	1.4 mg



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER PL-T 4 Pin

• Measuring Conditions

Calibration Current	0.320 A
HF Generator Rated Voltage	560 V
Resistor	1200 ohm

• Product Dimensions

Base Face to Base Face A	157.7 (max) mm
Insertion Length B	182.0 (max) mm
Overall Length C	197.7 (max) mm
Diameter D	41.0 (max) mm

• Product Data

Order code	927914982771
Full product code	927914982771



Full product name	MASTER PL-T 57W/827/4P 1CT
Order product name	MASTER PL-T 57W/827/4P 1CT/ 5X10CC
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500560056
Bar code on intermediate packing - EAN2	8711500560063
Bar code on outerbox - EAN3	8711500560087
Logistic code(s) - 12NC	927914982771
ILCOS code	FSM6H-57/27/1B-L/P-GX24q=5
Net weight per piece	101.000 gr

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes


Dimensional drawing

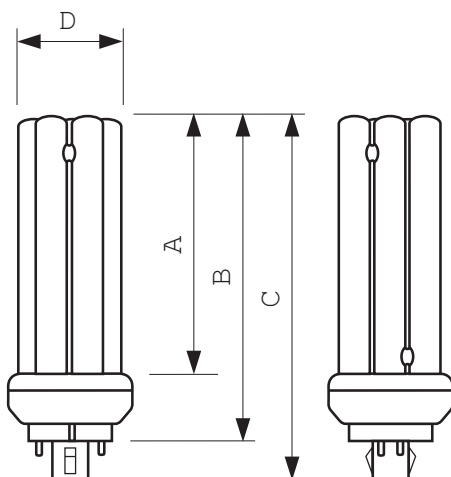

GX24q-5, 4P

Product	A (Max)	B (Max)	C (Max)	D (Max)
PL-T 57W/827/4P M	157.7	182.0	197.7	41.0

Photometric data

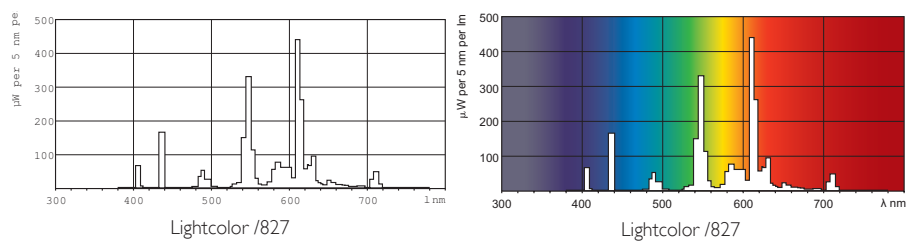

© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, August 4
data subject to change