



MASTER PL-L Polar 4 Pin

MASTER PL-L Polar 36W/830/4P 1CT

MASTER PL-L Polar is a medium to high-wattage linear compact fluorescent lamp, typically used for lower-temperature applications such as outdoor lighting and cold storage. The original Philips-invented bridge technology guarantees optimum performance in the lower-temperature applications. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

System Description	-
Cap-Base	2G11
Cap-Base Information	4P
Main Application	Low Temperature [Low Temperature environment]
Life to 10% failures EM	10000 hr
Life to 10% fail Preheat EL,3h	14000 hr
Life to 10% fail Nonpreh EL,3h	7500 hr
Life to 50% failures EM	15000 hr
Life to 50% fail Preheat EL,3h	20000 hr
Life to 50% fail Nonpreh EL,3h	10000 hr
LSF HF Preheat 2000h Rated,3h	99 %
LSF HF Preheat 4000h Rated,3h	99 %
LSF HF Preheat 6000h Rated,3h	98 %
LSF HF Preheat 8000h Rated,3h	97 %
LSF HF Preheat 12000h Rated,3h	94 %
LSF HF Preheat 16000h Rated,3h	82 %
LSF HF Preheat 20000h Rated,3h	50 %
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	98 %

LSF EM 6000h Rated, 3h cycle	96 %
LSF EM 8000h Rated, 3h cycle	94 %
LSF EM 12000h Rated,3h cycle	80 %

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Luminous Flux EM 25°C, Rated	2900 Lm
Luminous Flux EM 25°C, Nominal	2900 Lm
Lum Flux Rated EM 25°C,horiz	2900 Lm
Lum Flux Nominal EM 25°C,horiz	2900 Lm
Luminous Flux EL 25°C, Rated	2900 Lm
Luminous Flux EL 25°C, Nominal	2900 Lm
Lum Flux Rated HF 25°C,horiz	2900 Lm
Lum Flux Nominal HF 25°C,horiz	2900 Lm
Lum Efficacy Rated EM 25°C,hor	81 Lm/W
Lum Efficacy Rated HF 25°C,hor	81 Lm/W
LLMF HF 2000h Rated	95 %

MASTER PL-L Polar 4 Pin

LLMF HF 4000h Rated	94 %
LLMF HF 6000h Rated	93 %
LLMF HF 8000h Rated	92 %
LLMF HF 12000h Rated	91 %
LLMF HF 16000h Rated	90 %
LLMF HF 20000h Rated	90 %
LLMF EM 2000h Rated	94 %
LLMF EM 4000h Rated	93 %
LLMF EM 6000h Rated	92 %
LLMF EM 8000h Rated	91 %
LLMF EM 12000h Rated	90 %
Design Temperature	18 °C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	405 -

• Electrical Characteristics

Lamp Wattage	36 W
Lamp Wattage EM 25°C, Nominal	36 W
Lamp Wattage EM 25°C, Rated	36.0 W
Lamp Wattage EL 25°C, Rated	36.0 W
Lamp Wattage EL 25°C, Nominal	36 W
Lamp Voltage EM 25°C	102 V
Lamp Voltage EL 25°C	90 V
Lamp Current EM 25°C	0.445 A

Lamp Current EL 25°C	0.360 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	2.0 mg
Energy consumption kWh/1000h	40 kWh

• Measuring Conditions

• Product Dimensions

Base Face to Base Face A	385 (max) mm
Insertion Length B	410 (max) mm
Overall Length C	416.6 (max) mm
Diameter D	39.0 (max) mm
Diameter D1	18.0 (max) mm

• Product Data

Order code	927931083070
Full product code	927931083070
Full product name	MASTER PL-L Polar 36W/830/4P 1CT
Order product name	MASTER PL-L Polar 36W/830/4P 1CT/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500261588
Bar code on outerbox - EAN3	8711500261595
Logistic code(s) - 12NC	927931083070
ILCOS code	FSD-36/30/1B-E-2G11
Net weight per piece	104.000 gr



Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear

- Shorter lamp life when often switching and not well pre-heated electrodes

MASTER PL-L Polar 4 Pin

Dimensional drawing


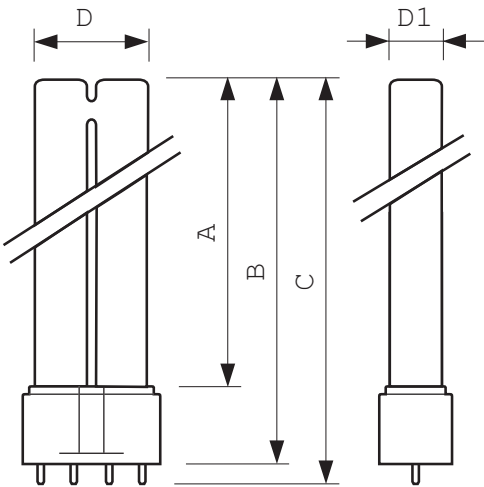


2G11

MASTER PL-L Polar 36W/830/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-L 36W/830/4P LT	385	410	416.6	39.0	18.0

Photometric data

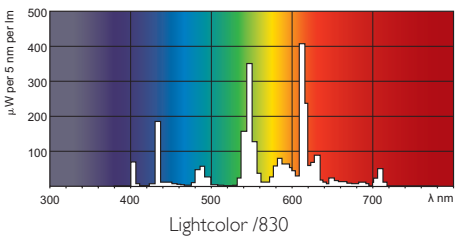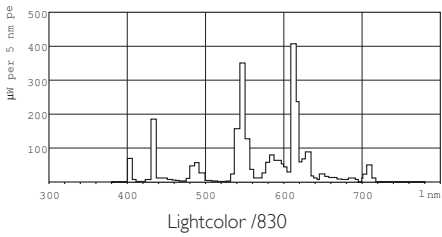



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change