


Safety luminaire

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; Room height 2.2 to 7 m; 2 high power LEDs, neutral white 4,000 K; lens made of polycarbonate; optimum thermal management via heat sink; Ceiling surface-mounted luminaire; Screw mounting of the gear tray and IP65 cover; Luminaire housing made of diecast aluminium, powder-coated; housing colour white (close to RAL9016); White fibre-glass reinforced PC cover with transparent PC light outlet; Luminaire for central emergency light supply, for single monitoring of the luminaire via Powerline in connection with the eBox System, settable emergency light level; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained and non-maintained mode: -40 °C to +45 °C; power supply: 220-240 V AC (+/- 10 %) 50-60 Hz; 176-280 V DC; Luminaire input power: 3.8 W (in maintained mode); Power in non-maintained mode: 0,3 W; Non-maintained and maintained mode settable via the central battery system; boost start function for faster orientation in emergencies thanks to higher illuminance levels at the start of emergency operation
; IP65; SC1; Luminaire wired with halogen-free leads. Supply line not halogen-free, ballproof; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK04; Dimensions: 200 x 145 x 64 mm; weight: 0.83 kg; Luminaire with D symbol (for use in environments in which the accumulation of conductive dust on the luminaire can be expected)




ZS_RES_F_PRO_MSC_IP65_ECx_ANT_WH.jpg

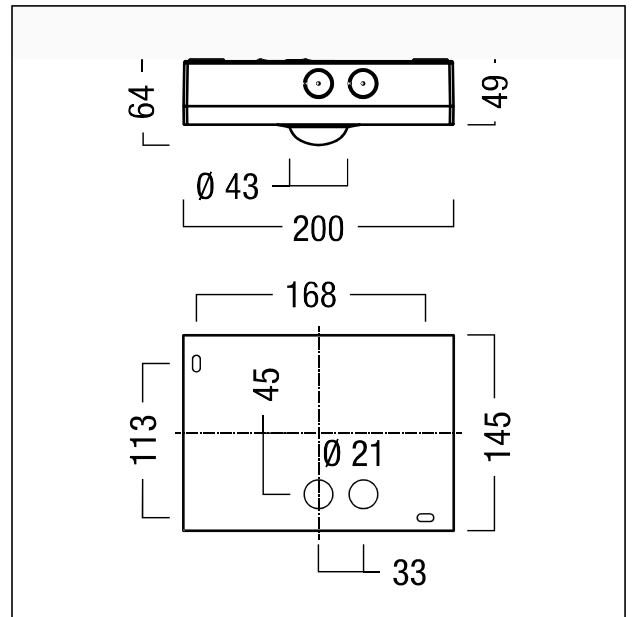

ZS_RES_M_PRO_MSC_IP65.wmf

Light Distribution

STD - standard

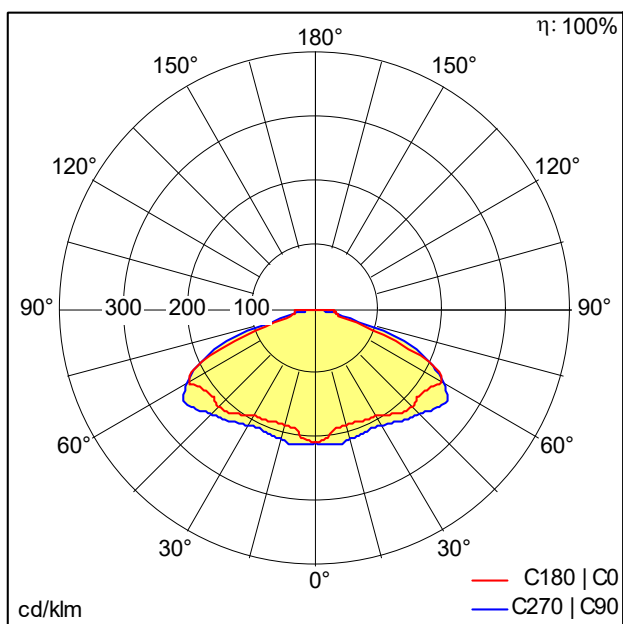

D43508_RESC_PRO_MSC_ANT_ECP_WH_IP65.idt

- Light Source: LED
- Luminaire luminous flux*: 240 lm
- Total emergency luminous flux: 240 lm
- Luminaire efficacy*: 63 lm/W
- Colour Rendering Index min.: 70
- Ballast: 1 x 89800573 EM powerLED NSI DIM 5W ZUM
- Chromaticity tolerance (initial MacAdam): 5
- Rated median useful life*:
L95 100000 h at 25 °C
- Luminaire input power*: 3.8 W Power factor = 0.65
- Dimming: PLC dimmable to 10%
- Maintenance category CIE 97: D - Enclosed IP2X

This product contains a light source of energy efficiency class D.

Please also consult the additional information on the next page



RESCLITE PRO MSC surface-mounted ceiling IP65



ZUMTOBEL

RESCLITE PRO MSC ANT ECP WH IP65

42185754

Safety luminaire

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

We reserve the right to make technical changes without prior notice. 04.07.2025 © Zumtobel - 5-year guarantee in compliance with the terms of guarantee at www.zumtobel.com/guarantee