


LED pendant luminaire

LED pendant luminaire (pre-assembled luminaire), "Stable White"; shielding angle 60°; lamp(s): LED2000-940; Colour rendering Ra > 90, colour temperature 4000 K (neutral white); Chromaticity tolerance (initial MacAdam): 3; Luminaire input power: 22 W; Luminaire luminous flux: 1994 lm, Luminaire efficacy: 91 lm/W; service life: 50000h at 85% luminous flux; includes control unit Slave luminaire for DALI control (DALI only); modular, high quality optical unit consisting of reflector and LED light chamber integrated in optimised thermal management of die-cast aluminium; smooth reflector highly reflective aluminized finish, iridescence-free; reflector made of high-quality, UV-resistant polycarbonate; luminaire housing (2-part) die-cast aluminium, white painted; Pendant suspension with white cable, white ceiling rose; pendant cable can be shortened to length on-site in the ceiling rose; luminaire wired with halogen-free leads; power connection: 5-pole connector terminal; mains voltage: 220-240V / 0/50/60Hz; Dimensions: Ø100 x 276 mm; total length of luminaire including pendant cable max. 2500mm; weight: 2.72 kg
 Note: UGR<19 for office applications compliant with EN12464 (depending on luminaire type)




ZS_PAI_F_100_WH_WHM_CHR.jpg

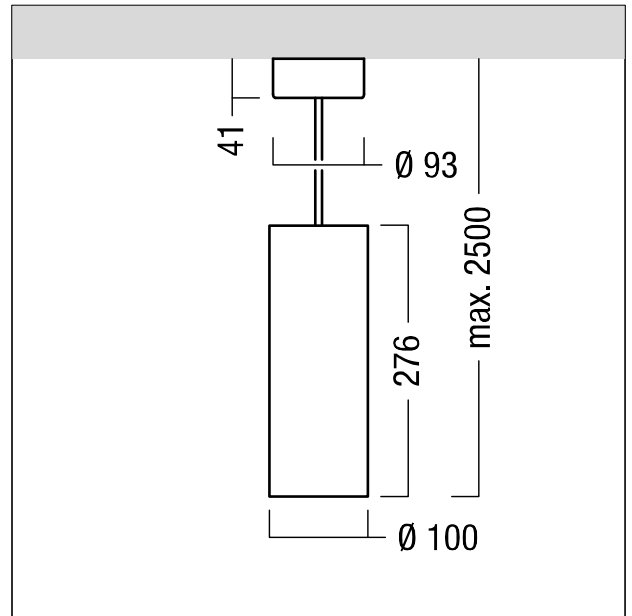

ZS_PAI_M_PEND_R100_LED.wmf

Light Distribution

STD - standard

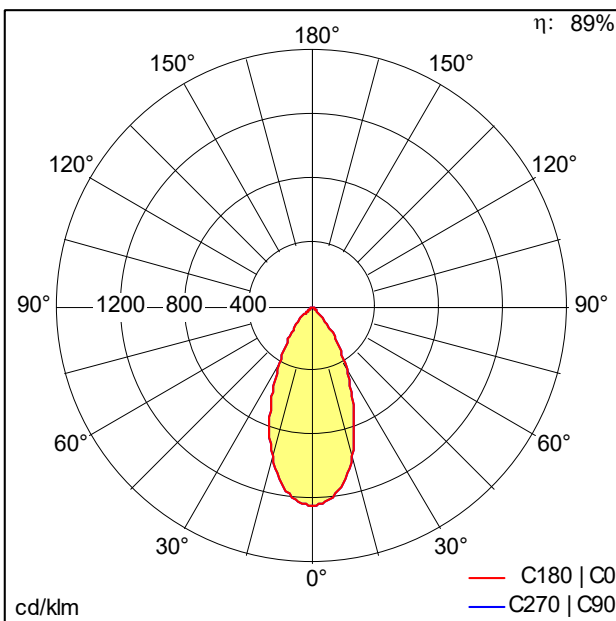

ST9391.Idt

- Light Source: LED
- Luminaire luminous flux*: 1994 lm
- Luminaire efficacy*: 91 lm/W
- Colour Rendering Index min.: 90
- Ballast: 1 x 28000665 LCA 25W 350-1050mA one4all C PRE
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life*: L85 50000 h at 25 °C
- Luminaire input power*: 22 W Power factor = 0.98
- Standby Power*: 0.15 W
- Dimming: LDO dimmable to 1% over DALI
- Maintenance category CIE 97: C - Closed Top Reflector

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.