




## Geko 5.1

### Technical data

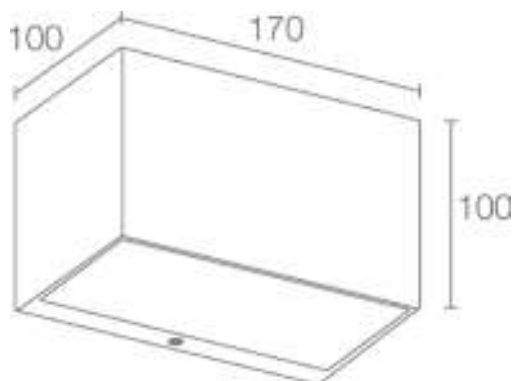

**Installation** wall mounted for outdoor applications, single beam

**Power** 10W

**Power supply** 230Vac

**Lumen output at source** 727 lm (3000K)

**Delivered lumen output** 535 lm (3000K, 30°)

#### Datasheet

Geko 5.1 wall mounted for outdoor applications, single beam; surface mounted (wall); Power: 10W; Power supply: 230Vac; Lumen output at source: 727 lm (3000K); Delivered lumen output: 535 lm (3000K, 30°); 5 power LEDs; LED colour: 2700K, 3000K, 4000K, 5000K; Optics: 7°, 10°, 30°, 70°, 10°x45°, asymmetrical; Material: body in die-cast aluminium, screen in serigraphed, transparent, tempered extra-clear glass; Finishes: grey, white, anthracite, cor-ten; built-in power supply unit; connection box with 0,30 m cable; Ingress protection: IP65; Impact resistance: IK07; Protection systems: PID; Operating temperature: -20°C — +45°C; Maximum device temperature: 45°C (Ta 25°C); Glow wire test: 960°; Photobiological safety: risk group 1 according to EN6 2471:2006; Appliance class: I; Weight: 1800 g; Dimensions: 170x100x100 mm; Accessories: WD0300E Spacer - white, WD0300F Spacer - grey, WD0300H Spacer - anthracite, WD0300T Spacer - cor-ten; Energy efficiency class: A / A+ / A++

<b>Mounting</b>	surface mounted (wall)
<b>Number and type of LED</b>	5 power LEDs
<b>LED colour</b>	2700K, 3000K, 4000K, 5000K
<b>Optics</b>	7°, 10°, 30°, 70°, 10°x45°, asymmetrical
<b>Material</b>	body in die-cast aluminium, screen in serigraphed, transparent, tempered extra-clear glass
<b>Finishes</b>	grey, white, anthracite, cor-ten
<b>Power supply unit</b>	built-in power supply unit
<b>Power cables</b>	connection box with 0,30 m cable
<b>Ingress protection</b>	IP65
<b>Impact resistance</b>	IK07
<b>Status</b>	Available

L&L Luce&Light srl

via della Tecnica 46,  
36031 Povolara di Dueville,  
Vicenza, Italy

Contact us

T +39 0444 360571  
F +39 0444 594304  
E [lucelight@lucelight.it](mailto:lucelight@lucelight.it)

2018 © L&L Luce&Light srl - P.I. 03417070244