


# A.24 - Suspension Diffused Emission - Linear Module - Direct Emission - 1176mm - 3000K - Black

Carlotta de Bevilacqua



IP20    Dimmerable: 

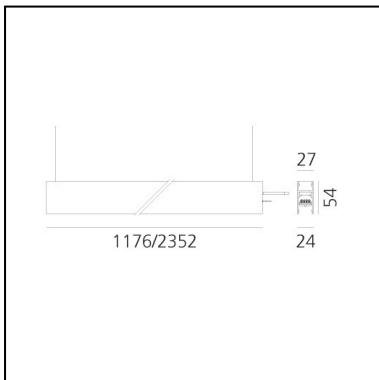

## LUMINAIRE

- Watt: **29W**
- Delivered lumen output: **2843lm**
- CCT: **3000K**
- Efficiency: **57%**
- Efficacy: **98.03lm/W**
- CRI: **90**

## DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

## FEATURES

- Product Code: **AQ41004**
- Colour: **Black**
- Installation: **Suspension**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Emission: **Direct**
- design by: **Carlotta de Bevilacqua**

## DIMENSIONS

- Length: **1176 mm**
- Width: **27 mm**
- Recessed depth: **54 mm**
- Weight: **kg 1.7**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Color Tolerance: **MacAdam 3SDCM**
- Service Life: **Life L70(17K) 102000h**

## Notes

For curved systems use only flexible opal diffusing screen. Do not mix flexible diffusing screen and opal diffusing screen.

\*Uses 1 DALI address.

Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.

1 suspension cable is also included.

End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.

Depending on the driver, the product can be undimmable or dimmable DALI.

**Accessories**



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - APP Compatible AQ16104APP



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - APP Compatible AQ17501APP



4pcs feed connectors (for powering multiple sections with a single power kit) AQ90500



0-10, 1-10, Potenziometro, Push, DALI to DALI-Selv Interface DV1061



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - APP Compatible AQ17504APP



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 10m - White AQ90600



A.24 - Suspension - Transition joint - Use between different typology modules (track-diffusing-sharping) - Black AQ49404



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 50m - White AQ90700



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 10m - Black AQ90800



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - Black Cable - DALI AQ15404



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 50m - Black AQ90900



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - DALI AQ16101



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - DALI AQ16104



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - DALI AQ16000



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - APP Compatible AQ16000APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - White Cable - APP Compatible AQ15401APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - Black Cable - APP Compatible AQ15404APP



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - APP Compatible AQ16101APP



A.24 - Opal Diffusing Screen - 10m AQ16200



A.24 - Suspension - Insulating Spacer - Use between modules powered by different power supplies (1pcs) - Black AQ45204



A.24 - Suspension - End caps. (2pcs) including 1 suspension cable 200H - Black AQ45104



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - White Cable - DALI AQ15401



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100



A.24 - Opal Diffusing Screen - 25m AQ16300



A.24 - Opal Diffusing Screen - 50m AQ16400



A.24 - Opal Diffusing Screen - 1176mm AQ16500



A.24 - Opal Diffusing Screen - 3528mm AQ16700



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - Black - Black Cable - Undimmable AQ17104



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - White - White Cable - Undimmable AQ17601



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - Black - Black Cable - Undimmable AQ17604



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - DALI AQ17501



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - DALI AQ17504



Auxiliary suspension cable (to be used for S-configuration) (1 pcs) AQ49500



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - White Cable - Undimmable AQ17401



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - Black Cable - Undimmable AQ17404



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - White - White Cable - Undimmable AQ17101