




LineaLed Wallwasher 8,5W - EL 3000K

Carlotta de Bevilacqua



IP65/67  

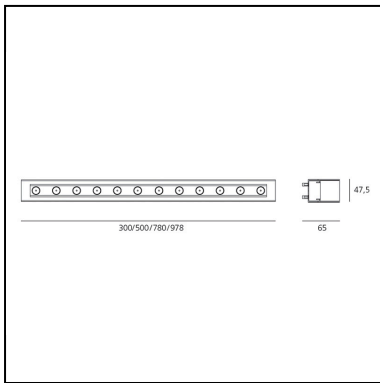

LUMINAIRE

- Power Supply: **Elettronic**
- Watt: **8,5W**
- Voltage: **24 Vdc**
- Delivered lumen output: **730lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **91.25lm/W**
- CRI: **80**

Notes

Flood optic

Wide luminous flow suitable for lighting large areas. (40° optic)

DESCRIPTION

Walk-over and drive-over recessed floor installation. Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture. 24Vdc remote ballast. Connect a maximum number of 10 fixtures in a continuous line. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

FEATURES

- Product Code: **NL17320ELKO**
- Colour: **Silver gray**
- Installation: **Recessed**
- Material: **Aluminium, transparent tempered glass.**
- Series: **Architectural Outdoor**
- Area contract: **Outdoor**
- design by: **Carlotta de Bevilacqua**

DIMENSIONS

- Length: **300 mm**
- Width: **48 mm**
- Height: **90 mm**
- Weight: **kg 0.9**
- Impact Resistance: **IK07**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **8,5W**
- Delivered lumen output: **1776lm**
- Color temperature (K): **3000K**
- Voltage: **24Vdc**

Accessories

NO
IMAGE
AVAILABLE

Housing end cap (pair) - 46,5 x 62,5 x 1,5mm
NL76750

NO
IMAGE
AVAILABLE

Female power connector for discontinuos connection
NL19023

NO
IMAGE
AVAILABLE

Male power connector for discontinuos
connection NL19021

NO
IMAGE
AVAILABLE

Housing L=982mm NL76700

NO
IMAGE
AVAILABLE

Cassaforma L=300mm NL76740

NO
IMAGE
AVAILABLE

Cassaforma L=500mm NL76730

NO
IMAGE
AVAILABLE

Cassaforma L=780mm NL76710

NO
IMAGE
AVAILABLE

ALIMENT. 40W 24Vdc IP67 NL62040

NO
IMAGE
AVAILABLE

CONNETTORE ALIMENTAZIONE + TAPPO NL19052

NO
IMAGE
AVAILABLE

ALIMENT. 70W 24Vdc IP67 NL89080

NO
IMAGE
AVAILABLE

ALIMENT. 150W 24Vdc IP67 NL62880



LINEALED STAFFA GIUNZIONE C/CASSA NL75810