

Jet 3

22676599 JET 3 LED 740 150W SPD15 CL2 L60 GREY

THORN

LED 150W 22676599_JET3_4K	CB	IP66	IK08		CE	T _a -30 +40
---------------------------	----	------	------	--	----	---------------------------


Jet 3

Cost effective road and street lighting lantern for direct point to point HID installation replacement schemes. Electronic, Fixed output. Body: Die-cast aluminium with anticorrosion coating in grey. Stainless steel glass pressing blocks (x4). Class II electrical, IP66, Impact strength: IK08. Lateral Mounting D60mm, -10°/+10° tilt. Complete with 4000K LED.


Dimensions: 486 x 210 x 75 mm
 Luminaire input power: 150 W
 Luminaire luminous flux: 19901 lm
 Luminaire efficacy: 133 lm/W
 Weight: 8.04 kg
 Scx: 0.08 m²



TLG_JET3_F_Lateral_Pole_Persp.jpg

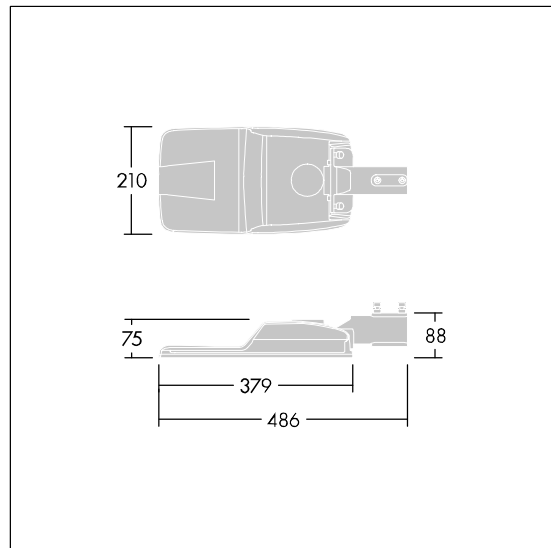

TLG_JET3_M_M.wmf

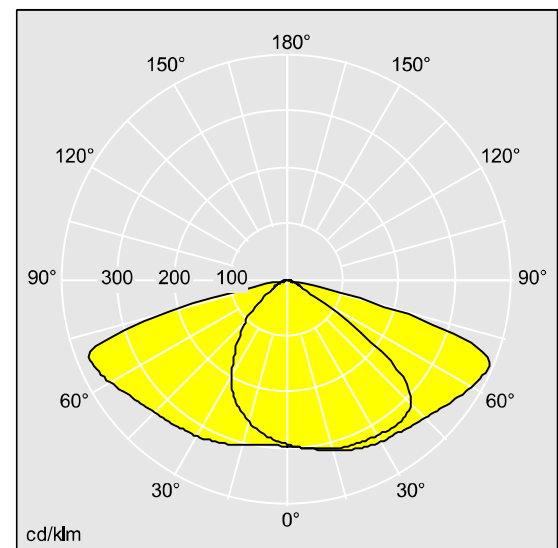

22676599_JET_3_LED_LED_740_150W_SPD15_CL2_L60_GREY.
ldt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 19901 lm
 Luminaire efficacy*: 133 lm/W
 Colour Rendering Index min.: 70
 Correlated colour temperature*: 4000 Kelvin
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 5
 Rated useful life (B10)*:
 L80 50000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 150 W Power factor = 0.95
 Control: FIX
 Maintenance category CIE 97: E - Dust-proof IP5X

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting