

# D-CO Bollard

THORN

## 96262100 D-CO LED BOLLARD 1000 30L50 830 CL1

LED 14W LED_507	ISO 9223 C3	IP65	IK10	⊕	CE	RoHS	EAC	UL	CCC	Ta50
-----------------	----------------	------	------	---	----	------	-----	----	-----	------

### D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 3000K LED


Dimensions: Ø150 x 1000 mm

Luminaire input power: 14 W


Weight: 5.45 kg



TLG\_DCOL\_F\_LEDBOLLARDLIT.jpg

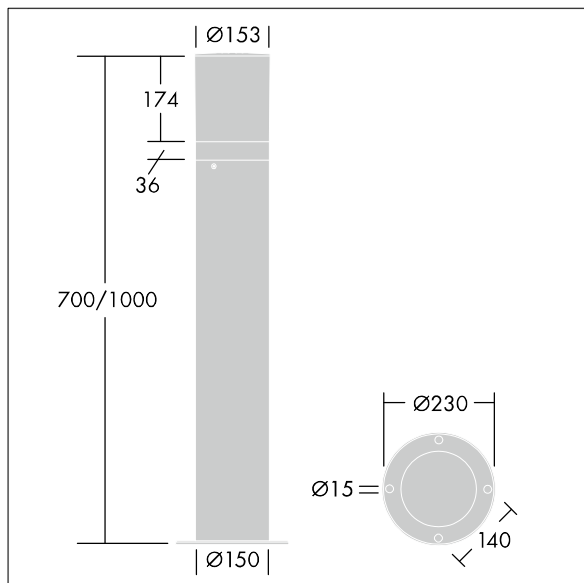

TLG\_DCOB\_M\_BOL.wmf

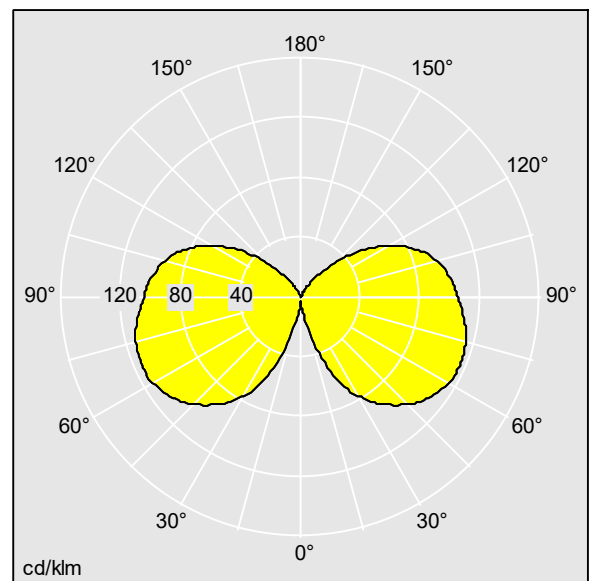

TLLA\_DCOLD3\_DC.ltd

Lamp position: STD - standard

Light Source: LED

Luminaire luminous flux\*: 507 lm

Luminaire efficacy\*: 36 lm/W

Correlated colour temperature\*: 3000 Kelvin

Rated useful life (B10)\*:

L80 50000 h at 25 °C

Ballast: 1x EL2

Luminaire input power\*: 14 W Power factor = 0.97

Dimming: FO

LOR: 1,00 ULOR: 0,38 DLOR: 0,62

This product contains a light source of energy efficiency class F.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting