

Equaline Mini

96630771 EQUAMINI L580 LED1050-840

THORN

LED	10W LED_EQUM_1182_HF	IP20	IK06		CE		ERAC			Ta35	
-----	----------------------	------	------	--	----	--	------	--	--	------	--


Equaline Mini

A slim Surface mounted LED batten luminaire. Electronic, fixed output control gear. Class I electrical. IP20, IK06. Body: extruded aluminium anodised finish. Diffuser: opal polycarbonate plastic. End-cap: Dual-colour injected polycarbonate plastic. Electrical connection via flap in rear of body. Continuous linking possible. Complete with 4000K LED


Dimensions: 580 x 37 x 60 mm
Luminaire input power: 9.8 W
Luminaire luminous flux: 1162 lm
Luminaire efficacy: 119 lm/W
Weight: 0.65 kg



TLG_EQUM_F_ST.jpg

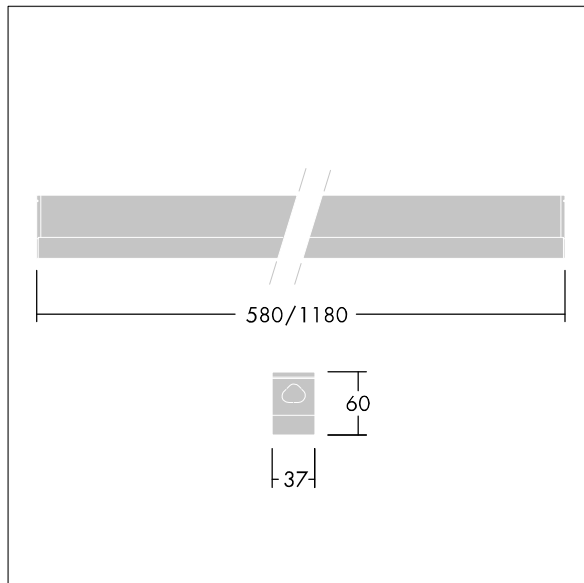

TLG_EQUM_M_LD1.wmf

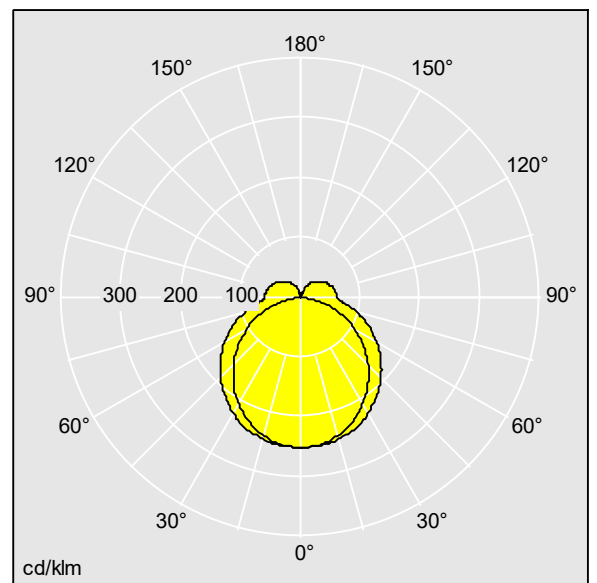

TLTP_EQUM_L580_LED1050_840.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1162 lm
Luminaire efficacy*: 119 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28002472 EQUAMINI L580 LED950-830
LOR: 0,98 ULOR: 0,16 DLOR: 0,83

Correlated colour temperature*: 4000 Kelvin
Chromaticity tolerance (initial MacAdam): 4
Rated median useful life*:
L70 50000 h at 25 °C
Luminaire input power*: 9.8 W
Dimming: FO
Maintenance category CIE 97: D - Enclosed IP2X

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group