

## 96642706 <NOVALINE LED3500-830 HF WH


<b>LED</b> 32W LED_NOVN_3500_3K	IP40	IK02							850°C	T <sub>a</sub> -20 +25
---------------------------------	------	------	--	--	--	--	--	--	-------	---------------------------

A round bulkhead LED luminaire. Electronic, fixed output control gear. Body and bezel: finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. Complete with 3000K LED.


Dimensions: Ø455 x 105 mm  
 Luminaire input power: 32.5 W  
 Luminaire luminous flux: 3200 lm  
 Luminaire efficacy: 98 lm/W  
 Weight: 2.14 kg



TLG\_NOVN\_F\_1000LEDWALLPDB.jpg

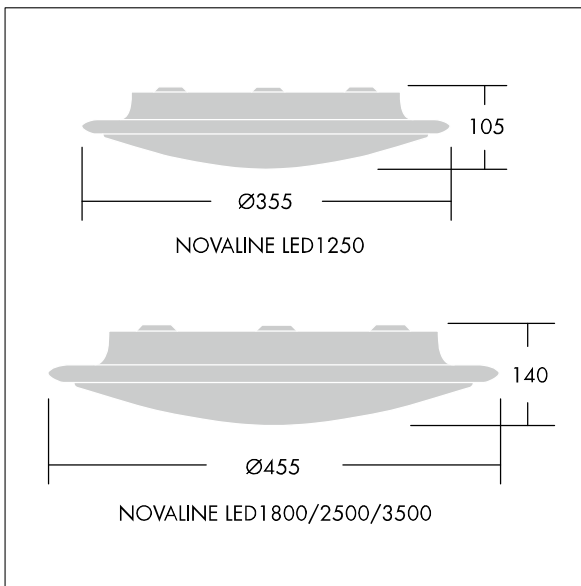

TLG\_NOVN\_M\_LED2.wmf

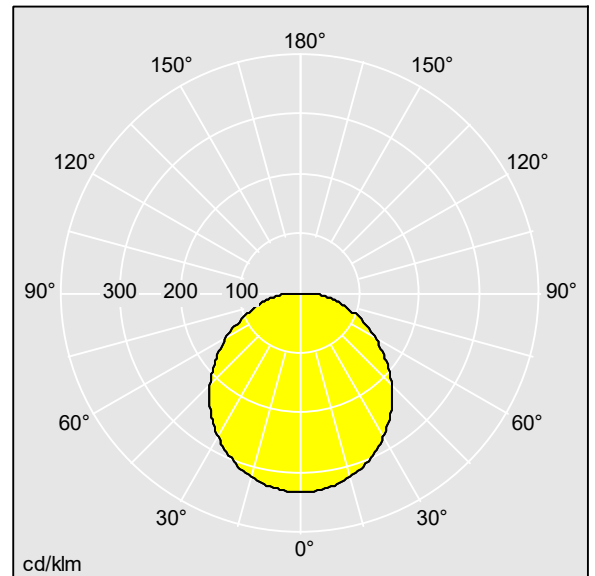

TLG\_SP\_0042296.lid

Lamp position: STD - standard  
 Light Source: LED  
 Luminaire luminous flux\*: 3200 lm  
 Luminaire efficacy\*: 98 lm/W  
 Colour Rendering Index min.: 80  
 Ballast: 1 x 28002492 LC 35W 800mA fixC C ADV  
 LOR: 1,00 ULOR: 0,03 DLOR: 0,97

Correlated colour temperature\*: 3000 Kelvin  
 Chromaticity tolerance (initial MacAdam): 3  
 Rated median useful life\*:  
 L90 50000 h at 25 °C  
 Luminaire input power\*: 32.5 W Power factor = 0.9  
 Dimming: FO  
 Maintenance category CIE 97: D - Enclosed IP2X

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group