




- Low profile 4.8cm height
- Unique elegant design
- Easy to install
- Compliant to EN 60 598-2-22
- Certificated by ENEC Kema Keur
- Protection rate IP42
- High temperature batteries Ni-Cd
- Opal diffuser version (EL5)
- Autotest version

The Cronus 6W is a compact low profile luminary with a stylish design which offers an attractive emergency lighting solution for a wide variety of areas. An additional small incandescence lamp is embodied in Cronus 6W indicating the normal charging mode while providing a smart night light solution. A full range of accessories, including a recessed base for wall or flush mounting and a plexiglass sign for deploying the luminary as an exit sign, as well as the opal diffuser version, are available in order to fulfill every modern need. All luminaries have a 3 years warranty to ensure product's reliability.



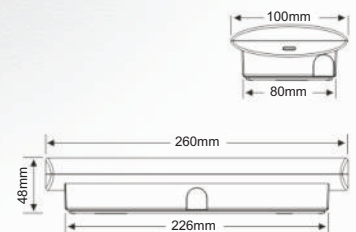






Order code					
EL5	FL6W T5	-	90'	2,4V-1,5Ah NiCd	Non maintained
EL6	FL6W T5	60 Lm	90'	2,4V-1,5Ah NiCd	Non maintained
EL6-210	FL6W T5	210 Lm	60'	6V-1,5Ah NiCd	Non maintained
EL6-3H	FL6W T5	70 Lm	180'	6V-1,5Ah NiCd	Non maintained
EL6-AUT	FL6W T5	210 Lm	60'	6V-1,5Ah NiCd	Non maintained
EL6M-AUT	FL6W T5	210 Lm	60'	6V-1,5Ah NiCd	Maintained

Order code	Description
EL6PS LR	Double side exit sign (Left / Right)
EL6PS D	Double side exit sign (Down)
EL6RB	Recessed base (both for wall or flush mounting)
02-435	Exit sign legend (Left/Right/ Down)

Autotest function

Specification

LED Indications (lights with 1 LED)

-  Stand by
 -  Stand by, First test to be executed or delayed duration test
 -  Fault: Lamp Failure
 -  Fault: Battery capacity too low or charge current incorrect
-  On
  Blinking Alternately
  Blinking

Self - contained emergency luminary, with maintained or non - maintained operation and an emergency duration of 60', 90' or 180' minutes. Certified by ENEC Kema Keur that meets all the European Standards. Utilizes a 6W fluorescence lamp and has IP42 protection rate. Body material made of ABS plastic and diffuser of Polycarbonate (glue wire tested 850 °C). Battery type is Ni-Cd, rechargeable of high temperature. A built-in incandescence lamp will indicate in real time the normal charging operation.

Suggested type for non - maintained luminary with 6W fluorescence lamp and 90' minutes emergency duration: **Cooper Cronus 6W: EL6**


Applications

- Residential applications
- Offices
- Hotels
- Restaurants
- Schools



Polar Diagram

Photometric Data

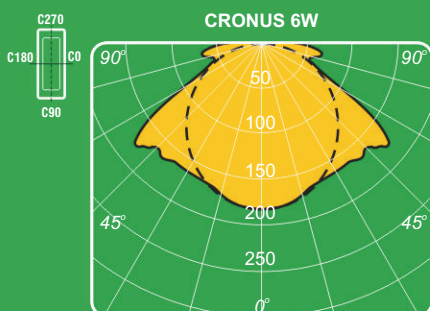

h	Distance for 1 Lux				Distance for 0,5 Lux			
02.60	02.32	06.95	01.96	05.58	03.98	08.32	03.29	07.16
02.80	02.22	07.17	01.92	05.62	04.08	08.62	03.31	07.35
03.00	02.03	07.25	01.85	05.65	04.13	08.90	03.33	07.46
03.20	01.89	06.98	01.75	05.68	03.99	09.24	03.34	07.63
03.50	01.56	06.62	01.56	05.65	03.81	09.63	03.32	07.77
04.00	00.89	06.18	00.92	05.40	03.59	10.20	03.20	08.00