



MASTER PL-T TOP 4 Pin

MASTER PL-T TOP 42W/840/4P 1CT

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes Amalgam controlled operation

Product data

• Product Data

Order code	927912284069
Full product name	MASTER PL-T TOP 42W/840/4P 1CT
Order product name	MASTER PL-T TOP 42W/840/4P 1CT/5X10CC
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500610089
Bar code on intermediate packing - EAN2	8711500610102
Bar code on outerbox - EAN3	8711500610164
Logistic code(s) - 12NC	927912284069
ILCOS code	FSMH-42/40/1B-L/P-GX24q=4
Net weight per piece	83.000 gr

LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

• Electrical Characteristics

Lamp Wattage	42 W
Lamp Voltage EL	124 V
25°C	
Lamp Current EL	0.320 A
25°C	
Dimmable	yes
Lamp Wattage EL	38.0 W
25°C, Rated	
Lamp Wattage EL	42 W
25°C, Nominal	

• General Characteristics

Cap-Base	GX24q-4
Cap-Base Information	4P
Life to 50% fail	13000 hr
Preheat EL,3h	
Life to 50% fail	7000 hr
Nonpreh EL,3h	
Life to 10% fail	4500 hr
Nonpreh EL,3h	
Life to 10% fail	8000 hr
Preheat EL,3h	
LSF HF Preheat	60 %
12000h Rated,3h	
LSF HF Preheat	90 %
8000h Rated,3h	

• Environmental Characteristics

Energy Efficiency	B
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	

• Light Technical Characteristics

Colour Code	840 [CCT of 4000K]
Colour Rendering	82 Ra8
Index	
Colour Designation	Cool White
Colour Temperature	4000 K
Chromaticity Coordinate X	380 -



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER PL-T TOP 4 Pin

Chromaticity Coordinate Y	379 -
Lum Efficacy Rated HF 25°C	80 Lm/W
LLMF HF 12000h Rated	81 %
LLMF HF 8000h Rated	84 %
LLMF HF 6000h Rated	85 %
LLMF HF 4000h Rated	88 %
LLMF HF 2000h Rated	92 %
Luminous Flux EL 25°C, Rated	3050 Lm
Luminous Flux EL 25°C, Nominal	3200 Lm

Design Temperature	28 C
--------------------	------




• Product Dimensions

Base Face to Base Face A	120.7 mm
Insertion Length B	145.0 mm
Overall Length C	160.7 mm
Diameter D	41 mm

• Measuring Conditions



Calibration Current	0.320 A
HF Generator Rated Voltage	270 V
Resistor	420 ohm

Dimensional drawing



Product	A (Max)	B (Max)	C (Max)	D (Max)
PL-T TOP 42W/840/4P A	120.7	145.0	160.7	41

Photometric data

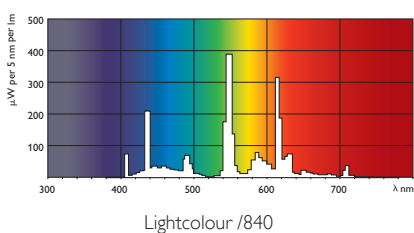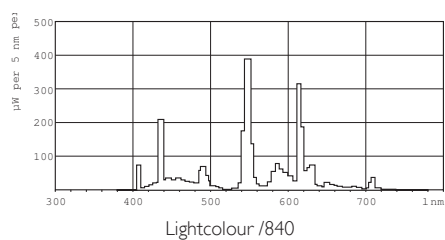

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 – Ecodesign requirements, applicable from 13 April 2010.

1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
 - b) Nominal and rated lamp luminous flux;
 - c) Rated lamp efficacy at 100 h in standard conditions (25 °C, for T5 lamps at 35 °C). For fluorescent lamps both at 50 Hz (mains frequency) operation (where applicable) and at High Frequency (> 50 Hz) operation (where applicable) for the same rated luminous flux in all cases, indicating for High Frequency operation the calibration current of the test conditions and/or the rated voltage of the HF generator with the resistance. It shall be stated in a conspicuous manner that the power dissipated by auxiliary equipment such as ballasts is not included in the power consumed by the source;
 - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - f) Lamp mercury content as X.X mg;
 - g) Colour Rendering Index (Ra) of the lamp;
 - h) Colour temperature of the lamp;
 - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
 - j) For fluorescent lamps without integrated ballast, the energy efficiency index(es) of ballasts as defined in Table 17 with which the lamp can operate.
- See Table 17-EuP245.pdf for Table 17 – Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps.
For more information see: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, March 18
data subject to change