

# MASTER PL-C 2 Pin

### MASTER PL-C 18W/830/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

#### Product data

#### • General Characteristics

| Cap-Base Cap-Base Information Life to 10% failures FM | G24d-2<br>2P<br>6500 hr |
|---|-------------------------|
| Life to 50% failures                                  | 10000 hr                |
| LSF EM 2000h Rated,<br>3h cycle                       | 99 %                    |
| LSF EM 4000h Rated,<br>3h cycle                       | 98 %                    |
| LSF EM 6000h Rated,<br>3h cycle                       | 92 %                    |
| LSF EM 8000h Rated,<br>3h cycle                       | 78 %                    |
|   |                         |

### • Light Technical Characteristics

| Color Code         | 830 [CCT of 3000K] |
|--------------------|--------------------|
| Color Rendering    | 82 Ra8             |
| Index              |                    |
| Color Designation  | Warm White         |
| (text)             |                    |
| Color Temperature  | 3000 K             |
| Luminous Flux EM   | 1200 Lm            |
| 25°C, Rated        |                    |
| Luminous Flux EM   | 1200 Lm            |
| 25°C, Nominal      |                    |
| Lum Efficacy Rated | 67 Lm/W            |
| EM 25°C            |                    |
| LLMF EM 2000h      | 92 %               |
| Rated              |                    |
| LLMF EM 4000h      | 87 %               |
| Rated              |                    |
| LLMF EM 6000h      | 84 %               |
| Rated              |                    |

| LLMF EM 8000h      | 81 %  |
|--------------------|-------|
| Rated              |       |
| Design Temperature | 28 C  |
| Chromaticity Coor- | 440 - |
| dinate X           |       |
| Chromaticity Coor- | 403 - |
| dinate Y           |       |

#### • Electrical Characteristics

| 18 W    |
|---------|
| 18 W    |
|         |
| 17.9 W  |
|         |
| 95 V    |
|         |
| 0.230 A |
|         |
| No      |
|         |

#### • Environmental Characteristics

| Energy Efficiency  | В      |  |
|--------------------|--------|--|
| Label (EEL)        |        |  |
| Mercury (Hg)       | 1.4 mg |  |
| Content            |        |  |
| Energy consumption | 22 kW  |  |
| kWh/1000h          |        |  |

#### Product Dimensions

| Base Face to Base  | 109./ (max) mm |
|--------------------|----------------|
| Face A             |                |
| Insertion Length B | 128.0 (max) mm |
| Overall Length C   | 150.4 (max) mm |
| Diameter D         | 27.1 (max) mm  |
|                    |                |





### MASTER PL-C 2 Pin

Diameter D1 27.1 (max) mm

• Product Data

Order code 927905783040 Full product code 927905783040

Full product name MASTER PL-C 18W/830/2P 1CT Order product name MASTER PL-C 18W/830/2P 1CT/

5X10CC

Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50

Bar code on pack - 8711500620910

EAN1

Bar code on intermediate packing - 8711500621207

EAN2

Bar code on 8711500715777

outerbox - EAN3

Logistic code(s) - 927905783040

12NC

ILCOS code FSQ-18/30/1B-I-G24d=2


Net weight per piece 57.800 gr

### Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position


### • Dimming is not possible

### Dimensional drawing

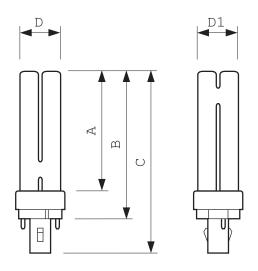


#### MASTER PL-C 18W/830/2P 1CT

| Product         | A (Max) | B (Max) | C (Max) | D (Max) | D1 (Max) |
|-----------------|---------|---------|---------|---------|----------|
| PL-C 18W/830/2P | 109.7   | 128.0   | 150.4   | 27.1    | 27.1     |



## MASTER PL-C 2 Pin

### Photometric data

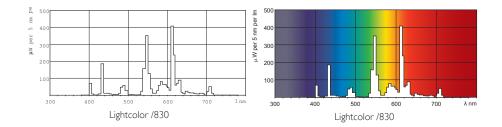



 $\ \odot$  2013 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.