

MASTERCcolour CDM-T

MASTERCcolour CDM-T 35W/842 G12 - 0010 1CT

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light



Product data

• General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EM	8000 hr
Life to 5% failures EL	8000 hr
Life to 10% failures EM	9000 hr
Life to 10% failures EL	9000 hr
Life to 20% failures EM	10000 hr
Life to 20% failures EL	10000 hr
Life to 50% failures EM	12000 hr
Life to 50% failures EL	12000 hr

• Light Technical Characteristics

Color Code	842 [CCT of 4200K]
Color Rendering Index	84 Ra8
Color Designation (text)	Cool White
Color Temperature	4200 K
Color Temperature Technical	4200 K
Luminous Flux Lamp EL	3300 Lm
Luminous Efficacy Lamp EL	81 Lm/W
Lumen Maintenance EL 2000h	90 %

Lumen Maintenance EL 5000h	85 %
Lumen Maintenance EL 10000h	70 %
Chromaticity Coordinate X	0.370 -
Chromaticity Coordinate Y	0.367 -

• Electrical Characteristics

System Power EL	44 W
Lamp Wattage	35 W
Lamp Wattage EL 25°C, Rated	38.0 W
Lamp Wattage EL 25°C, Nominal	35.0 W
Lamp Voltage	85 V
Lamp Current EL	0.46 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Ignition Peak Voltage	3500 (min) V
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	2.7 mg
Energy consumption kWh/1000h	41 kWh

PHILIPS

- UV-related Characteristics

- Luminaire Design Requirements

Cap-Base Temperature	280 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	500 (max) C

- Product Dimensions

Reference Length A	90 (max) mm
Overall Length C	103 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	5 mm
Light Center Length L [inch]	2.2 in
Overall Length C [inch]	3.9375 (max) in

Diameter D [inch] 0.75 in

- Product Data


Order code	928094305125
Full product code	928094305125
Full product name	MASTERColour CDM-T 35W/842 G12 - 0010 1CT
Order product name	MASTERC CDM-T 35W/842 G12 - 0010 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500211262
Bar code on outerbox - EAN3	8711500211279
Logistic code(s) - 12NC	928094305125
ILCOS code	MT/UB-35/842-H-G12-20/90
Net weight per piece	0.028 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.

Dimensional drawing

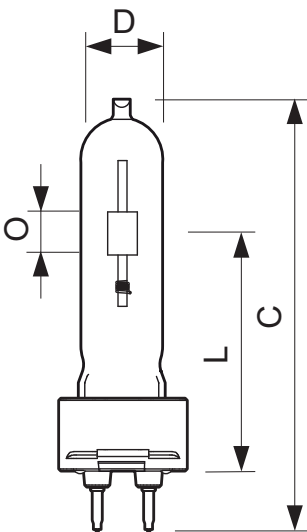

MASTERColour CDM-T 35W/842 G12 - 0010 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T 35W/842 G12	103	20	55	56	57	5

Dimensional drawing



G12

Photometric data

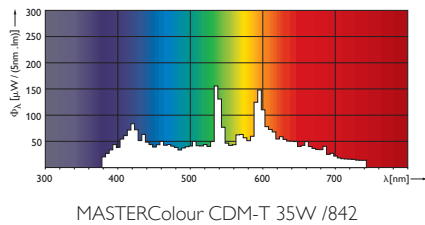

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change