



MASTER TL-D Xtra

MASTER TL-D Xtra 58W/830 1SL

Fluorescent lamp with a diameter of 26 mm

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Cap-Base Information	Green Plate
Bulb	T8 [26 mm]
Life to 50% failures EM	36000 hr
Life to 50% fail	55000 hr
Preheat EL,3h	
Life to 50% fail	22000 hr
Nonpreh EL,3h	
Life to 10% fail	19000 hr
Nonpreh EL,3h	
Life to 10% fail	47000 hr
Preheat EL,3h	
Life to 10% failures EM	30000 hr
LSF EM 20000h	94 %
Rated,3h cycle	
LSF EM 16000h	95 %
Rated,3h cycle	
LSF EM 12000h	95 %
Rated,3h cycle	
LSF EM 8000h Rated,	96 %
3h cycle	
LSF EM 6000h Rated,	96 %
3h cycle	
LSF EM 4000h Rated,	97 %
3h cycle	
LSF EM 2000h Rated,	99 %
3h cycle	

• Electrical Characteristics

Lamp Wattage	58 W
Dimmable	Yes
Lamp Current EM 25°C	0.665 A

Lamp Wattage EM 25°C, Rated	58.5 W
Lamp Wattage EM 25°C, Nominal	58 W
Lamp Voltage EM 25°C	108 V

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	3.0 mg

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Chromaticity Coordinate X	435 -
Chromaticity Coordinate Y	403 -
Luminance Average EM	1.50 cd/cm ²
Lum Efficacy Rated EM 25°C	91 lm/W
LLMF EM 20000h Rated	90 %
LLMF EM 16000h Rated	92 %
LLMF EM 12000h Rated	93 %



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER TL-D Xtra

LLMF EM 8000h Rated	94 %
LLMF EM 6000h Rated	94 %
LLMF EM 4000h Rated	95 %
LLMF EM 2000h Rated	96 %
Luminous Flux EM 25°C, Rated	5200 Lm
Luminous Flux EM 25°C, Nominal	5200 Lm
Design Temperature	25 C

• Product Dimensions



Base Face to Base Face A	1500.0 (max) mm
Insertion Length B	1504.7 (min), 1507.1 (max) mm
Overall Length C	1514.2 (max) mm

Diameter D	28 (max) mm
------------	-------------

• Product Data



Order code	927983483014
Full product code	927983483014
Full product name	MASTER TL-D Xtra 58W/830 1SL
Order product name	MASTER TL-D Xtra 58W/830 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500558886
Bar code on outerbox - EAN3	8711500558893
Logistic code(s) - 12NC	927983483014
ILCOS code	FD-58/30/1B-E-G13
Net weight per piece	172.600 gr

Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Xtra 58W/830	1500.0	1504.7	1507.1	1514.2	28

Photometric data

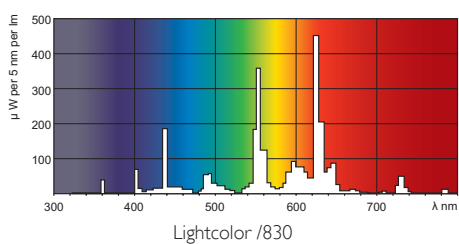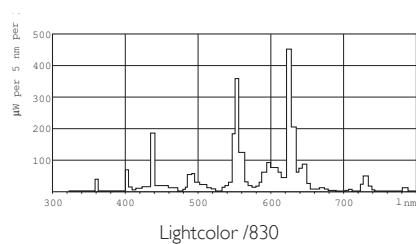

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 – Ecodesign requirements, applicable from 13 April 2010.

1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
 - b) Nominal and rated lamp luminous flux;
 - c) Rated lamp efficacy at 100 h in standard conditions (25 °C, for T5 lamps at 35 °C). For fluorescent lamps both at 50 Hz (mains frequency) operation (where applicable) and at High Frequency (> 50 Hz) operation (where applicable) for the same rated luminous flux in all cases, indicating for High Frequency operation the calibration current of the test conditions and/or the rated voltage of the HF generator with the resistance. It shall be stated in a conspicuous manner that the power dissipated by auxiliary equipment such as ballasts is not included in the power consumed by the source;
 - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - f) Lamp mercury content as X.X mg;
 - g) Colour Rendering Index (Ra) of the lamp;
 - h) Colour temperature of the lamp;
 - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
 - j) For fluorescent lamps without integrated ballast, the energy efficiency index(es) of ballasts as defined in Table 17 with which the lamp can operate.
- See Table 17-EuP245.pdf for Table 17 – Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps.
For more information see: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, June 7
data subject to change