

# MASTER PL-C 2 Pin

## MASTER PL-C 18W/840/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

## Product data

#### • General Characteristics

G24d-2 2P 6500 hr
10000 hr
99 %
98 %
92 %
78 %

## • Light Technical Characteristics

Color Code Color Rendering Index	840 [CCT of 4000K] 82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EM 25°C, Rated	1200 Lm
Luminous Flux EM 25°C, Nominal	1200 Lm
Lum Efficacy Rated EM 25°C	67 Lm/W
LLMF EM 2000h Rated	92 %
LLMF EM 4000h	87 %
Rated LLMF EM 6000h Rated	84 %

LLMF EM 8000h	81 %
Rated	20.0
Design Temperature	28 C
Chromaticity Coor- dinate X	380 -
Chromaticity Coor-	380 -
dinate Y	360 -
ullate i	

### • Electrical Characteristics

18 W
18 W
17.9 W
95 V
0.230 A
No

#### • Environmental Characteristics

Energy Efficiency	В
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	_
Energy consumption	22 kWh
kWh/1000h	

#### Product Dimensions

Base Face to Base	109./ (max) mm
Face A	
Insertion Length B	128.0 (max) mm
Overall Length C	150.4 (max) mm
Diameter D	27.1 (max) mm





## MASTER PL-C 2 Pin

Diameter D1 27.1 (max) mm

• Product Data

Order code 927905784040 Full product code 927905784040

Full product name MASTER PL-C 18W/840/2P 1CT Order product name MASTER PL-C 18W/840/2P 1CT/

5X10CC

Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50

Bar code on pack - 8711500620934

EAN1

Bar code on inter- 8711500621238 mediate packing -

EAN2

Bar code on 8711500715784

outerbox - EAN3

Logistic code(s) - 927905784040

12NC

ILCOS code FSQ-18/40/1B-I-G24d=2


Net weight per piece 57.800 gr

## Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position


## • Dimming is not possible

## Dimensional drawing

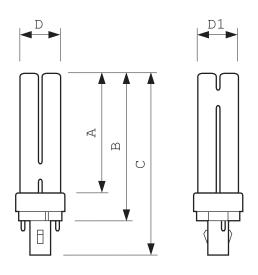


#### MASTER PL-C 18W/840/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)	
PL-C 18W/840/2P	109.7	128.0	150.4	27.1	27.1	



## MASTER PL-C 2 Pin

## Photometric data

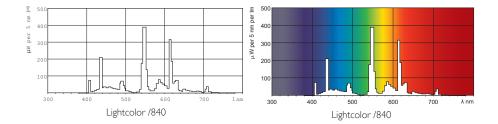



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.