



HalogenA IDE

HalogenA IDE 500W E40 230V CL 1CT

Mains-voltage high-wattage double-envelope giving a white halogen light

PHILIPS

Product data

• General Characteristics

Cap-Base	E40
Bulb	T38 [T 38mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 50% failures	2000 hr
Nominal Lifetime	2000 hr
Rated Lifetime (hours)	2000 hr
Rated Lifetime (years)	2 an

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	2900 K
Color Temperature Technical	2900 K
Luminous flux lamp	10250 Lm
Rated Luminous Flux	10250 Lm
Luminous Efficacy Lamp	20.5 Lm/W
LLMF - end nominal lifetime	80 (min) %

• Electrical Characteristics

Rated Wattage	500.0 W
Lamp Wattage	500 W
Lamp Wattage Technical	500.0 W
Power Factor	1 -
Voltage	230 V
Lamp Current	2.17 A
Dimmable	Yes
Starting Time	0.0 s

Warm-up Time to 60% Light Outp instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	C
Energy consumption kWh/1000h	500 kWh

• Measuring Conditions

Switching cycle	8000X
-----------------	-------


• Product Dimensions

Overall Length C	216 (max) mm
Diameter D	38.5 (max) mm

• Product Data

Order code	923900144240
Full product code	923900144240
Full product name	HalogenA IDE 500W E40 230V CL 1CT
Order product name	HalA IDE 500W E40 230V CL 1CT/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8711500491268
Bar code on outerbox - EAN3	8711500499943
Logistic code(s) - 12NC	923900144240
ILCOS code	HEGT-500-230-e40
Net weight per piece	141.000 gr


Dimensional drawing

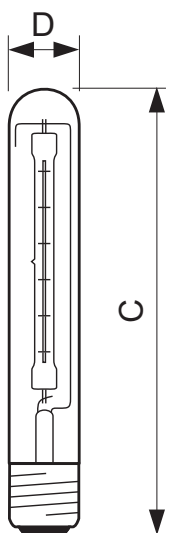

HalogenA IDE 500W E40 230V CL 1CT

Product	C (Max)	D (Norm)	D (Max)
IDE 500W E40 230V T38 CL	216	-	38.5

Dimensional drawing



E40



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change