

MASTER PL-S 2 Pin

MASTER PL-S 9W/830/2P 1CT

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	G23 [Two-Pin Compact Fluorescent; low preheat current; two retainers]
Cap-Base Information	2P
Life to 10% failures	6500 hr
EM	
Life to 50% failures	10000 hr
EM	
LSF EM 2000h Rated,	99 %
3h cycle	
LSF EM 4000h Rated,	98 %
3h cycle	
LSF EM 6000h Rated,	95 %
3h cycle	
LSF EM 8000h Rated,	86 %
3h cycle	
,	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering	82 Ra8
Index	
Color Designation	Warm White
(text)	
Color Temperature	3000 K
Luminous Flux EM	583 Lm
25°C, Rated	
Luminous Flux EM	600 Lm
25°C, Nominal	
Lum Efficacy Rated	67 Lm/W
EM 25°C	
LLMF EM 2000h	94 %
Rated	
LLMF EM 4000h	91 %
Rated	
LLMF EM 6000h	89 %
Rated	

LLMF EM 8000h	86 %
Rated	20.0
Design Temperature	28 C 435 -
Chromaticity Coor- dinate X	435 -
Chromaticity Coor-	401 -
dinate Y	TO 1 -
ulliate i	

• Electrical Characteristics

Lamp Wattage	9 W
Lamp Wattage EM	9 W
25°C, Nominal	
Lamp Wattage EM	8.7 W
25°C, Rated	
Lamp Voltage EM	60 V
25°C	
Lamp Current EM	0.170 A
25°C	
Dimmable	No

• Environmental Characteristics

Energy Efficiency	Α		
Label (EEL)			
Mercury (Hg)	1.4 mg		
Content			
Energy consumption	11 kWh		
kWh/1000h			

Product Dimensions

Base Face to Base	129 (max) mm
Face A	
Insertion Length B	145 (max) mm
Overall Length C	167 (max) mm
Diameter D	28 (max) mm





MASTER PL-S 2 Pin

Diameter D1 13 (max) mm

• Product Data

Order code 927936083011 Full product code 927936083011

Full product name MASTER PL-S 9W/830/2P 1CT Order product name MASTER PL-S 9W/830/2P 1CT/

5X10BOX

Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50

32.000 gr


• Dimming is not possible

Net weight per piece

Warnings and Safety


- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position

Dimensional drawing




MASTER PL-S 9W/830/2P UNP

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-S 9W/830/2P LM	129	145	167	28	13



MASTER PL-S 2 Pin

Photometric data

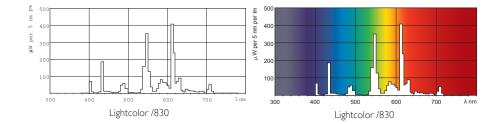



© 2013 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.