



# MASTER PL-S 4 Pin

## MASTER PL-S 11W/830/4P 1CT

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

### Product data

#### • General Characteristics

Cap-Base	2G7
Cap-Base Information	4P
Life to 10% failures EM	6500 hr
Life to 10% fail Preheat EL,3h	8000 hr
Life to 10% fail Nonpreh EL,3h	4500 hr
Life to 50% failures EM	10000 hr
Life to 50% fail Preheat EL,3h	13000 hr
Life to 50% fail Nonpreh EL,3h	7000 hr
LSF HF Preheat 2000h Rated,3h	99 %
LSF HF Preheat 4000h Rated,3h	98 %
LSF HF Preheat 6000h Rated,3h	97 %
LSF HF Preheat 8000h Rated,3h	92 %
LSF HF Preheat 12000h Rated,3h	66 %
LSF HF Preheat 16000h Rated,3h	30 %

#### • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K

Luminous Flux EM 25°C, Rated	900 Lm
Luminous Flux EM 25°C, Nominal	900 Lm
Luminous Flux EL 25°C, Rated	900 Lm
Luminous Flux EL 25°C, Nominal	900 Lm
Lum Efficacy Rated EM 25°C	82 Lm/W
LLMF HF 2000h Rated	95 %
LLMF HF 4000h Rated	92 %
LLMF HF 6000h Rated	90 %
LLMF HF 8000h Rated	88 %
LLMF HF 12000h Rated	86 %
Design Temperature	28 C
Chromaticity Coordinate X	435 -
Chromaticity Coordinate Y	401 -

#### • Electrical Characteristics

Lamp Wattage	11 W
Lamp Wattage EM 25°C, Nominal	11 W
Lamp Wattage EM 25°C, Rated	11.6 W
Lamp Wattage EL 25°C, Rated	11.0 W
Lamp Wattage EL 25°C, Nominal	11 W

# MASTER PL-S 4 Pin

Lamp Voltage EM 25°C	89 V
Lamp Voltage EL 25°C	89 V
Lamp Current EM 25°C	0.160 A
Lamp Current EL 25°C	0.160 A
Dimmable	Yes

### • Environmental Characteristics

Energy Efficiency	A
Label (EEL)	
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	13 kWh

### • Product Dimensions

Base Face to Base Face A	196 (max) mm
Insertion Length B	214 (max) mm
Overall Length C	219.9 (max) mm

Diameter D	28 (max) mm
Diameter D1	13 (max) mm

### • Product Data



Order code	927936683011
Full product code	927936683011
Full product name	MASTER PL-S 11W/830/4P 1CT
Order product name	MASTER PL-S 11W/830/4P 1CT/ 5X10BOX
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500261199
Bar code on inter- mediate packing - EAN2	8711500261205
Bar code on outerbox - EAN3	8711500261212
Logistic code(s) - 12NC	927936683011
ILCOS code	FSD-11/30/1B-E-2G7
Net weight per piece	41.000 gr

## Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes

## Dimensional drawing

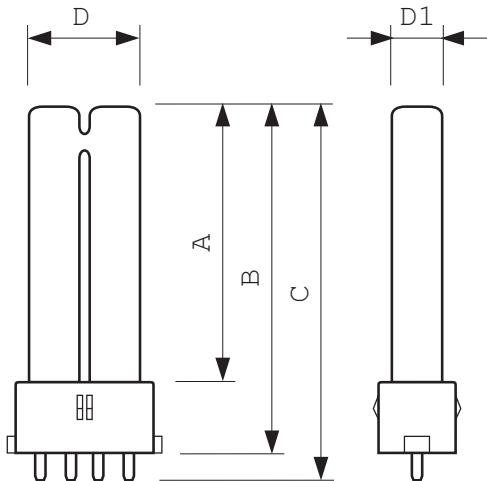


2G7

### MASTER PL-S 11W/830/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-S 11W/830/4P LM	196	214	219.9	28	13

## Photometric data

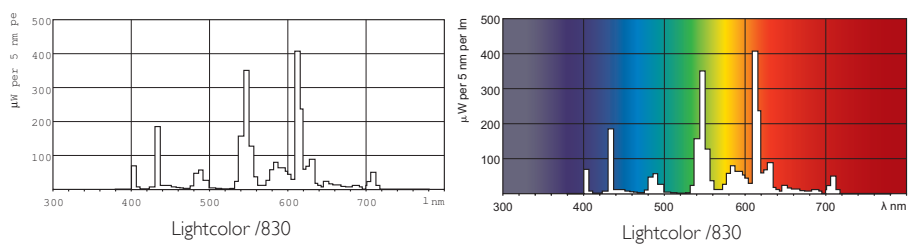

© 2013 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, October 9  
data subject to change