

MSR Gold™ MiniFastFit (Touring/Stage)

MSR Gold™ 1000 MiniFastFit



Thanks to the specially designed lamp base, the MSR Gold™ MiniFastFit takes just seconds to replace, to help ensure non-stop clubbing entertainment. In addition, the innovative gold plated pins ensure excellent current transfer to prolong lamp and lamp holder lifetimes and thereby reduce lamp replacement costs. Easy handling and small compact fixture designs are allowed by the lamps compact size, while the very short arc provides a high perceived brightness and high beam intensity.

Product data

• General Characteristics

System Description	MiniFastFit
Cap-Base	PGJX36
Cap-Base Information	PGJX36
Execution	-
Operating Position	any
Main Application	Entertainment
Life to 50% failures EM	750 hr

• Light Technical Characteristics

Color Code	-
Color Rendering Index	81 Ra8
Color Temperature	6000 K
Color Temperature Technical	6000 K
Chromaticity Coordinate X	0.321 -
Chromaticity Coordinate Y	0.327 -
Luminous Flux Lamp EM	83000 Lm
Luminous Efficacy Lamp EM	83 Lm/W

• Electrical Characteristics

Lamp Wattage	1000 W
Lamp Wattage Technical	1000.0 W
Lamp Current	11.1 A
Ignition Supply Voltage	198 (min) V

Dimmable No

• Luminaire Design Requirements

Pinch Temperature	500 (max) C
Bulb Temperature	950 (max) C

• Product Dimensions

Overall Length C	112 (max) mm
Diameter D	26 (max) mm
Width F	35.3 (min), 36 (nom), 36.5 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	5.5 mm


• Product Data

Order code	928171405115
Full product code	928171405115
Full product name	MSR Gold™ 1000 MiniFastFit
Order product name	MSR Gold 1000 MiniFastFit
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291785088
Bar code on outerbox - EAN3	8718291785095
Logistic code(s) - 12NC	928171405115
Net weight per piece	0.055 kg

PHILIPS


MSR Gold™ MiniFastFit (Touring/Stage)

Dimensional drawing

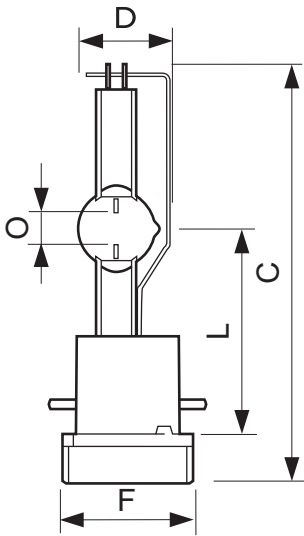

MSR Gold™ 1000 MiniFastFit

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR GOLD 1000 MiniFastFit	-	-	-	112	26	-	35.3	36	36.5	55	56	57	5.5



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 14
data subject to change