

MASTERCcolour CDM-T Elite

MASTERCcolour CDM-T Elite 35W/942 G12 1CT

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering



Product data

• General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	12000 hr
Life to 50% failures EL	15000 hr

• Light Technical Characteristics

Color Code	942 [CCT of 4200K]
Color Rendering Index	86 (min), 89 (nom) Ra8
Color Designation (text)	Cool White
Color Temperature	4200 K
Color Temperature Technical	4350 K
Luminous Flux Lamp EM	3900 Lm
Luminous Flux Lamp EL	3850 Lm
Luminous Efficacy Lamp EM	98 Lm/W
Luminous Efficacy Lamp EL	98 Lm/W
Lumen Maintenance EL 1000h	89 %
Lumen Maintenance EL 2000h	84 %
Lumen Maintenance EL 4000h	80 %

Lumen Maintenance EL 5000h	79 %
Lumen Maintenance EL 8000h	75 %
Lumen Maintenance EL 10000h	73 %
Lumen Maintenance EL 12000h	71 %
Design Mean Lumens EL	2990 Lm
Chromaticity Coordinate X	0.366 -
Chromaticity Coordinate Y	0.364 -

• Electrical Characteristics

System Power EL	43 W
Lamp Wattage	35 W
Lamp Wattage EM 25°C, Nominal	35.0 W
Lamp Wattage EM 25°C, Rated	40.0 W
Lamp Wattage EL 25°C, Rated	39.0 W
Lamp Wattage EL 25°C, Nominal	35.0 W
Lamp Voltage	90 V
Lamp Current EM	0.51 A
Lamp Current EL	0.44 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No



asimpleswitch.com

PHILIPS

MASTERCcolour CDM-T Elite

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	4.7 mg
Energy consumption kWh/1000h	42 kWh

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.4 (max) - 8 (min) h500lx
--------------------------------	----------------------------

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	500 (max) C

• Product Dimensions

Reference Length A	90 (max) mm
Overall Length C	103 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm

Arc Length O	5.2 mm
Light Center Length L [inch]	2.16 (min), 2.20 (nom), 2.24 (max) in
Overall Length C [inch]	4 (max) in
Diameter D [inch]	0.79 (max) in

• Product Data


Order code	928193605131
Full product code	928193605131
Full product name	MASTERCcolour CDM-T Elite 35W/942 G12 1CT
Order product name	MASTERC CDM-T Elite 35W/942 G12 1CT
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8718291163640
Bar code on outerbox - EAN3	8718291163657
Logistic code(s) - 12NC	928193605131
ILCOS code	MT/UB-35/942-H-G12-20/90
Net weight per piece	0.028 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

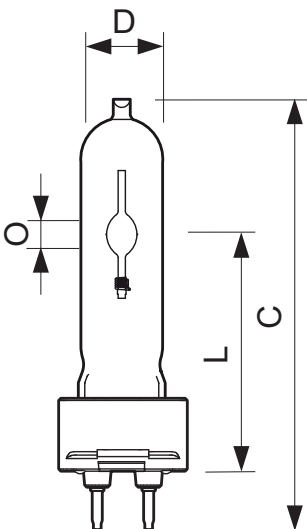

MASTERCcolour CDM-T Elite 35W/942 G12 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T Elite 35W/942 G12	103	20	55	56	57	5.2

Dimensional drawing



G12

Photometric data

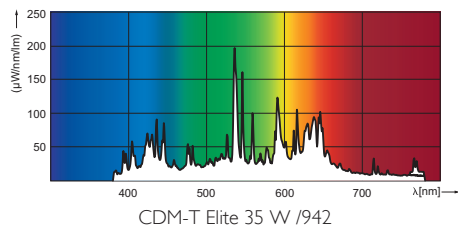

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 6
data subject to change