

HF-Performer II Xtreme for TL5/TL-D lamps

HF-Performer Xtreme 258 TL-D EII 220-240V 50/60Hz



HF-Performer Xtreme is a unique X-technology from Philips that guarantees the highest lifetime reliability for lamps and enables an extra-long and reliable HF system life with an energy efficiency index (CELMA EEI) of A2.

Product data

• General Characteristics

Application code	EII
Rated Lamptype	TL-D
Rated Number of Lamps	2 piece
Rated Ballast-Lamp Power	58
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 360x30x28
Energy Efficiency Index	A2
Lifetime 90% surv.@Tcaselife	100000 hr
Ignition Method	Warm Start

• Operating Characteristics

Automatic restart	Yes
Ignition time	2.0 (max) s
Operating frequency	42 (min) kHz
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Inrush current Peak	31 (max) A
Inrush current Width	0.350 ms
Earth leakage current	0.5 mA
Power losses gear	10.0 W
Constant wattage deviation	-2%/+2%
Ballast Lumen Factor	1.0 -
PowerFactor 100% output power	0.96 -
Battery voltage lamp ignition	198 V

Battery voltage running lamps	176-254
Max ballast on MCB(16A type B)	12 x
Crestfactor	1.7 (max) -
Hum and Noise level	Inaudible
Total Harmonic Distortion EUR	10 %

• Wiring Characteristics

Cable-Cap output-wires to earth	200 pF
Cable-Cap output-wires mutual	200 pF
Conn.type input terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Conn.type output terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Striplength	8.0-9.0 mm
Wcs Input terminals	0.50-1.00 mm ²
Wcs Output terminals	0.50-1.00 mm ²
Wcs auto insertion (ALF/ADS)	0.5 mm ²

• System Chars on driver level

Rated Lamp Power on TL-D	58
System Power on TL-D	60
Lamp Power on TL-D	50
Power Loss on TL-D	10



asimpleswitch.com

PHILIPS

HF-Performer II Xtreme for TL5/TL-D lamps

• Temperature Characteristics

T-case life	75 C
T-case maximum	75 (max) C
T-ignition	-25 (min), 60 (max) C
T-ambient	-25 (min), 60 (max) C
T-storage	-25 (min), 80 (max) C

• Product Dimensions

Length A1	360.0 mm
Fixing Hole Distance	350.0 mm
Length A2	
Width B1	30.0 mm
Height C1	28.0 mm
Fixing Hole Diameter D1	4.2 mm

• Approval & Application Chars


EMI 9kHz .. 30 MHz	EN 55015
EMI 30 MHz .. 1000MHz	EN 55022 level B [Level = Class]
Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929
Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001

Harmonic current emissions	IEC 61000-3-2
EMC Immunity	IEC 61547
Vibrations	IEC 68-2-6 Fc
Bumps	IEC 68-2-29 Eb
Humidity	EN 61347-2-3 clause 11
Approval marks	ENEC / VDE-EMV
CE marking	Yes
Temperature marking	110 [Yes]
Emergency standard	IEC 60598-2-22

• Product Data

Order code	912060 30
Full product code	871150091206030
Full product name	HF-P Xt 258 TL-D EII 220-240V 50/60Hz
Order product name	HF-P Xt 258 TL-D EII 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500912060
Bar code on outerbox - EAN3	8711500912077
Logistic code(s) - 12NC	913700618066
Net weight per piece	0.400 kg

Dimensional drawing

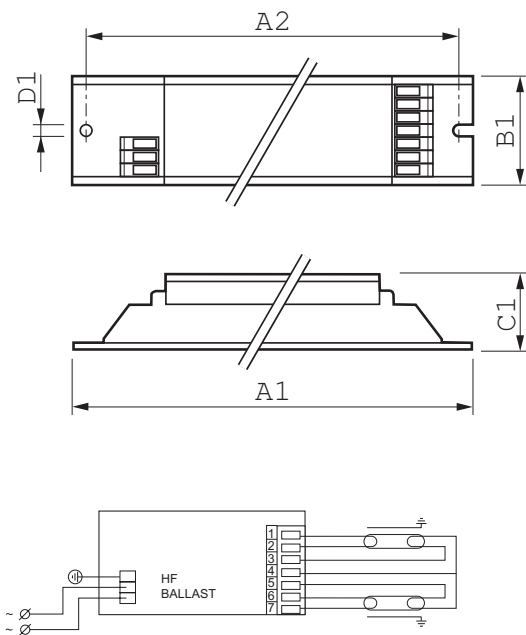

HF-Performer Xtreme 258 TL-D EII 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-P Xt 258 TL-D EII 220-240V 50/60Hz	360.0	350.0	30.0	28.0	4.2



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 15
data subject to change