



MASTERCcolour CDM-T Elite

MASTERCcolour CDM-T Elite 50W/930 G12 1CT

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	12000 hr
Life to 50% failures EL	15000 hr

• Light Technical Characteristics

Color Code	930 [CCT of 3000K]
Color Rendering Index	87 (min), 90 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	2970 K
Luminous Flux Lamp EL	5400 Lm
Luminous Efficacy Lamp EL	108 Lm/W
Lumen Maintenance EL 1000h	97 %
Lumen Maintenance EL 2000h	95 %
Lumen Maintenance EL 4000h	90 %
Lumen Maintenance EL 5000h	88 %
Lumen Maintenance EL 8000h	87 %

Lumen Maintenance EL 10000h	83 %
Lumen Maintenance EL 12000h	82 %
Lumen Maintenance EL 15000h	80 %
Design Mean Lumens EL	4750 Lm
Chromaticity Coordinate X	0.435 -
Chromaticity Coordinate Y	0.396 -

• Electrical Characteristics

System Power EL	56 W
Lamp Wattage	50 W
Lamp Wattage EL 25°C, Rated	50.0 W
Lamp Wattage EL 25°C, Nominal	50.0 W
Lamp Voltage	90 V
Lamp Current EL	0.57 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	6.4 mg
Energy consumption kWh/1000h	55 kWh



• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.3 (max) - 8 (min) h500lx
-----------------------------------	-------------------------------

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	500 (max) C

• Product Dimensions

Reference Length A	90 (max) mm
Overall Length C	103 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	6 mm
Light Center Length L [inch]	2.16 (min), 2.20 (nom), 2.24 (max) in

Overall Length C [inch]	4 (max) in
Diameter D [inch]	0.79 (max) in

• Product Data


Order code	928191705131
Full product code	928191705131
Full product name	MASTERColour CDM-T Elite 50W/930 G12 1CT
Order product name	MASTERC CDM-T Elite 50W/930 G12 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900930603
Bar code on outerbox - EAN3	8727900930610
Logistic code(s) - 12NC	928191705131
ILCOS code	MT/UB-50/930-H-G12-20/90
Net weight per piece	0.030 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

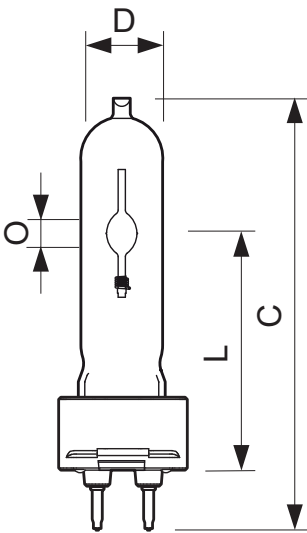

MASTERColour CDM-T Elite 50W/930 G12 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T Elite 50W/930 G12	103	20	55	56	57	6

Dimensional drawing



G12

Photometric data

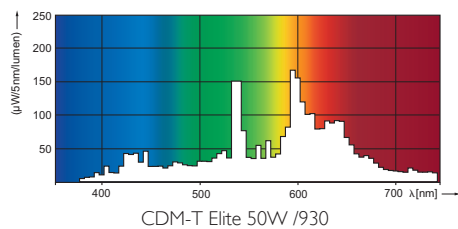

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 11
data subject to change