



MASTER PL-C Xtra 2 Pin

MASTER PL-C Xtra 18W/840/2P 1CT

This is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. MASTER PL-C Xtra lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-C lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	G24d-2
Cap-Base Information	2P
Life to 10% failures EM	12000 hr
Life to 50% failures EM	16000 hr
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	98 %
LSF EM 6000h Rated, 3h cycle	97 %
LSF EM 8000h Rated, 3h cycle	95 %
LSF EM 12000h Rated, 3h cycle	90 %
LSF EM 16000h Rated, 3h cycle	50 %

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EM 25°C, Rated	1200 Lm
Luminous Flux EM 25°C, Nominal	1200 Lm
Lum Efficacy Rated EM 25°C	67 Lm/W
LLMF EM 2000h Rated	92 %

LLMF EM 4000h Rated	87 %
LLMF EM 6000h Rated	84 %
LLMF EM 8000h Rated	81 %
LLMF EM 12000h Rated	79 %
LLMF EM 16000h Rated	78 %
LLMF EM 20000h Rated	77 %
Design Temperature	28 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Lamp Wattage	18 W
Lamp Wattage EM 25°C, Nominal	17 W
Lamp Wattage EM 25°C, Rated	17.9 W
Lamp Voltage EM 25°C	100 V
Lamp Current EM 25°C	0.220 A
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	3.0 mg

MASTER PL-C Xtra 2 Pin

Energy consumption
kWh/1000h

22 kWh

• Product Dimensions

Base Face to Base
Face A 109.7 (max) mm
Insertion Length B 128.0 (max) mm
Overall Length C 150.4 (max) mm
Diameter D 27.1 (max) mm
Diameter D1 27.1 (max) mm

• Product Data

Order code 927906484014
Full product code 927906484014
Full product name MASTER PL-C Xtra 18W/840/2P
1CT



Order product name MASTER PL-C Xtra 18W/840/2P
1CT/5X10BOX
Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50
Bar code on pack -
EAN1 8711500950307
Bar code on inter-
mediate packing -
EAN2 8711500950314
Bar code on
outerbox - EAN3 8711500950321
Logistic code(s) -
12NC 927906484014
ILCOS code FSQ-18/40/1B-I-G24d=2
Net weight per piece 57.800 gr

Warnings and Safety

- Dimming is not possible

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position


Dimensional drawing

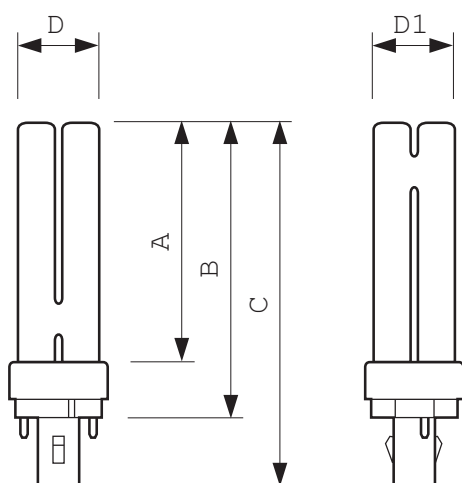

MASTER PL-C Xtra 18W/840/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C Xtra 18W/840/2P	109.7	128.0	150.4	27.1	27.1

Photometric data

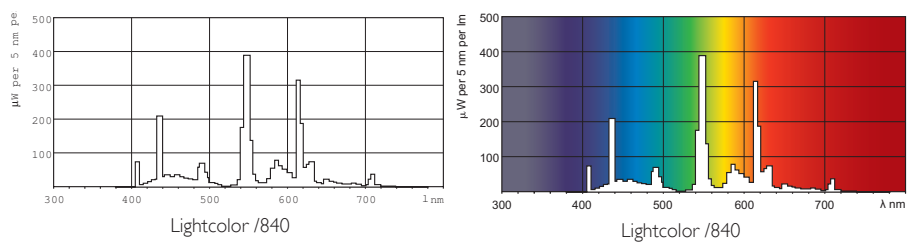

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change