



MASTER PL-C Xtra 2 Pin

MASTER PL-C Xtra 26W/840/2P 1CT

This is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. MASTER PL-C Xtra lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-C lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	G24d-3
Cap-Base Information	2P
Life to 10% failures EM	12000 hr
Life to 50% failures EM	16000 hr
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	98 %
LSF EM 6000h Rated, 3h cycle	97 %
LSF EM 8000h Rated, 3h cycle	95 %
LSF EM 12000h Rated, 3h cycle	90 %
LSF EM 16000h Rated, 3h cycle	50 %

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EM 25°C, Rated	1800 Lm
Luminous Flux EM 25°C, Nominal	1800 Lm
Lum Efficacy Rated EM 25°C	68 Lm/W
LLMF EM 2000h Rated	92 %

LLMF EM 4000h Rated	87 %
LLMF EM 6000h Rated	84 %
LLMF EM 8000h Rated	81 %
LLMF EM 12000h Rated	79 %
LLMF EM 16000h Rated	78 %
LLMF EM 20000h Rated	77 %
Design Temperature	28 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Lamp Wattage	26 W
Lamp Wattage EM 25°C, Nominal	26 W
Lamp Wattage EM 25°C, Rated	26.5 W
Lamp Voltage EM 25°C	105 V
Lamp Current EM 25°C	0.325 A
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	3.0 mg

MASTER PL-C Xtra 2 Pin

Energy consumption 32 kWh
kWh/1000h

• Product Dimensions

Base Face to Base Face A 130.7 (max) mm
Insertion Length B 149.0 (max) mm
Overall Length C 171.4 (max) mm
Diameter D 27.1 (max) mm
Diameter D1 27.1 (max) mm

• Product Data

Order code 927906284014
Full product code 927906284014
Full product name MASTER PL-C Xtra 26W/840/2P 1CT



Order product name MASTER PL-C Xtra 26W/840/2P 1CT/5X10BOX
Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50
Bar code on pack - EAN1 8711500898869
Bar code on intermediate packing - EAN2 8711500898876
Bar code on outerbox - EAN3 8711500898883
Logistic code(s) - 12NC 927906284014
ILCOS code FSQ-26/40/1B-I-G24d=3
Net weight per piece 64.300 gr

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position

- Dimming is not possible


Dimensional drawing

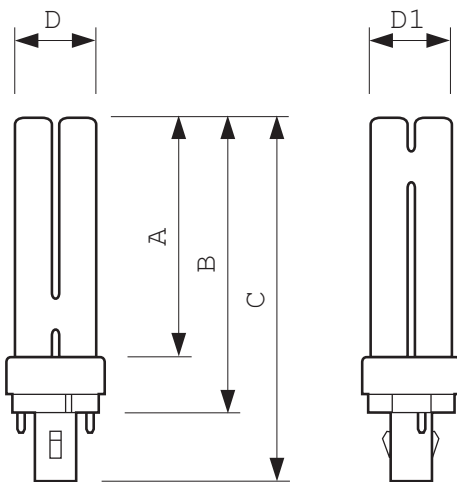

MASTER PL-C Xtra 26W/840/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C Xtra 26W/840/2P	130.7	149.0	171.4	27.1	27.1

Photometric data

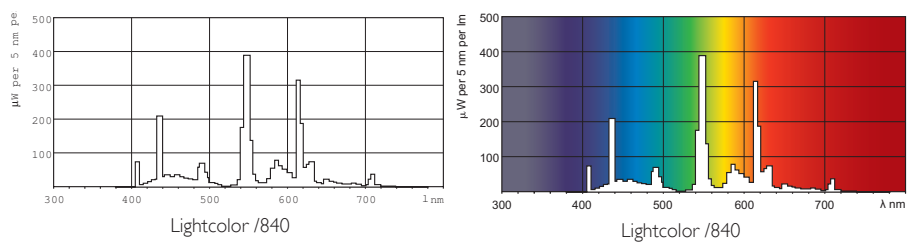

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, June 27
data subject to change