



MASTER PL-T 4 Pin

MASTER PL-T 57W/840/4P 1CT

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	GX24q-5
Cap-Base Information	4P
Life to 10% fail	8000 hr
Preheat EL,3h	
Life to 10% fail	4500 hr
Nonpreh EL,3h	
Life to 50% fail	13000 hr
Preheat EL,3h	
Life to 50% fail	7000 hr
Nonpreh EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	90 %
8000h Rated,3h	
LSF HF Preheat	60 %
12000h Rated,3h	

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL	4200 Lm
25°C, Rated	
Luminous Flux EL	4300 Lm
25°C, Nominal	
Lum Efficacy Rated	75 (min) Lm/W
HF 25°C	

LLMF HF 2000h	92 %
Rated	
LLMF HF 4000h	88 %
Rated	
LLMF HF 6000h	86 %
Rated	
LLMF HF 8000h	84 %
Rated	
LLMF HF 12000h	81 %
Rated	
Design Temperature	28 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	379 -

• Electrical Characteristics

Lamp Wattage	57 W
Lamp Wattage EL	56.0 W
25°C, Rated	
Lamp Wattage EL	57 W
25°C, Nominal	
Lamp Voltage EL	160 V
25°C	
Lamp Current EL	0.325 A
25°C	
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	59 kWh

MASTER PL-T 4 Pin

• Measuring Conditions

Calibration Current	0.320 A
HF Generator Rated Voltage	560 V
Resistor	1200 ohm

• Product Dimensions

Base Face to Base Face A	157.7 (max) mm
Insertion Length B	182.0 (max) mm
Overall Length C	197.7 (max) mm
Diameter D	41.0 (max) mm

• Product Data

Order code	927914984071
------------	--------------




Full product code	927914984071
Full product name	MASTER PL-T 57W/840/4P 1CT
Order product name	MASTER PL-T 57W/840/4P 1CT/ 5X10CC
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500611451
Bar code on intermediate packing - EAN2	8711500611468
Bar code on outerbox - EAN3	8711500611499
Logistic code(s) - 12NC	927914984071
ILCOS code	FSM6H-57/40/1B-L/P-GX24q=5
Net weight per piece	101.000 gr

- Shorter lamp life when often switching and not well pre-heated electrodes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear


Dimensional drawing

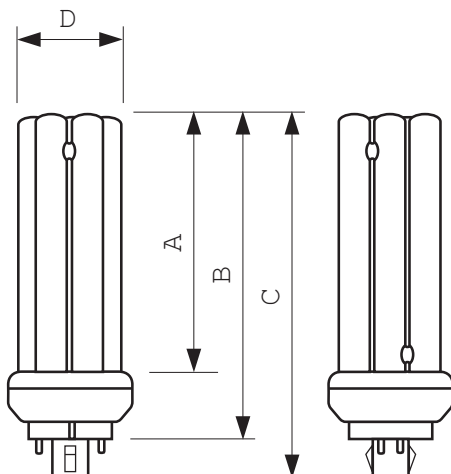

MASTER PL-T 57W/840/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)
PL-T 57W/840/4P M	157.7	182.0	197.7	41.0

Photometric data

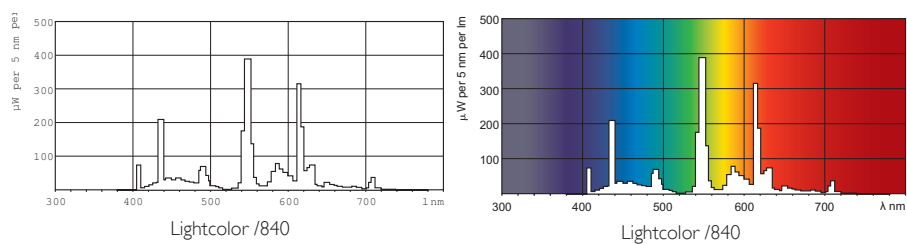

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change