



MASTERColour CDM-T Elite MW

MASTERColour CDM-TMW Elite 210W/942 1CT

The medium wattage lighting system that gives superior, longer-lasting white light for both indoor and outdoor use

Benefits

• General Information

Cap base	PGZ18 [PGZ18]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	12500 h
Life to 10% failures (nom.)	16000 h
Life to 50% failures (nom.)	30000 h
ANSI code HID	C183/E

• Light Technical

Lamp Luminous Flux (Min)	21000 lm
Lamp Luminous Flux (Nom)	23000 lm
Colour Designation	Cool White (CW)
Lumen maintenance 12,000 hours (nom.)	90 %
Lumen maintenance 10,000 hours (nom.)	91 %
Lumen maintenance 2,000 hours (nom.)	98 %
Lumen maintenance 20,000 hours	80 %
Lumen maintenance – 40% life	90 %
Lumen maintenance 5,000 hours (nom.)	94 %
Lumen maintenance – 10% life	95 %
Saturated red	80
Design mean lumens	20470 lm
Chromaticity coordinate X (nom.)	0.381

Chromaticity coordinate Y (nom.)	0.374
Colour Temperature, horizontal (Max)	- K
Colour Temperature, horizontal (Min)	- K
Colour Temperature, horizontal (Nom)	3960 K
Lamp Luminous Efficacy EM (Min)	98 lm/W
Lamp Luminous Efficacy EM (Nom)	108 lm/W
Colour Rendering Index,horiz (Min)	89
Colour Rendering Index,horiz (Nom)	92

• Operating and Electrical

Power (Rated) (Nom)	210.0 W
Lamp current run-up (nom.)	3.2 A
Ignition supply voltage (max.)	4000 V
Ignition peak voltage (max.)	4000 V
Ignition supply voltage (min.)	3000 V
Re-ignition time (min.) (max.)	10 min
Ignition time (max.)	180 s
Voltage (Max)	115 V
Voltage (Min)	90 V
Voltage (Nom)	98 V

PHILIPS

• Controls and Dimming

Run-up time 90% (max.) 1.5 min

• Mechanical and Housing

Bulb finish Clear (CL)
Maximum overall length (max.) 7.4 in

• Approval and Application

Energy efficiency label (EEL) A+
Picogram per lumen hour 40.3 pg/lm.h
Mercury (Hg) content (max.) 25 mg
Energy Consumption kWh/1000 h 231 kWh

• UV

PET (NIOSH) (nom.) 34.1 h/500lx

Damage factor D/fc (nom.) 0.30

• Luminaire Design Requirements

Bulb temperature (max.) 600 °C
Cap base temperature (max.) 250 °C


• Product Data

Full product code 871829113952200
Order product name MASTERColour CDM-TMW Elite 210W/942 1CT
EAN/UPC – product 8727900801804
Order code 928601164931
Numerator – 1
quantity per pack
Numerator – packs 12
per outer box
Material no. (12NC) 928601164931
Net weight (piece) 115.000 g
ILCOS Code MT-210/42/1A-H-PGZ18

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing, except for protected versions with PGZX18 cap, which are designed for open luminaires (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing


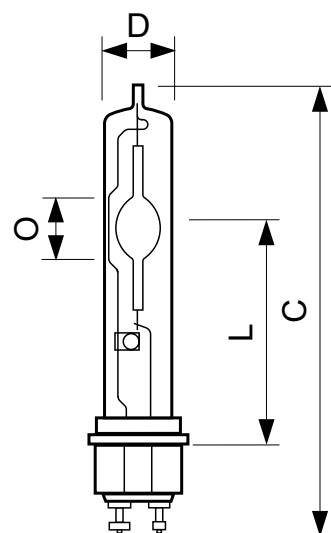


PGZX18/PGZX18., T12/TMW28


CDM TMW 210W/942 PGZ18 U

Product	D	D	D	C	C
MASTERColour CDM-TMW Elite 210W/942 1CT	29 mm	1.1 in	28 mm	188 mm	186 mm

Dimensional drawing



Photometric data

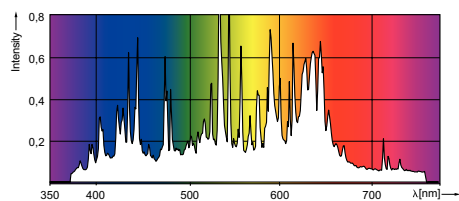

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change