


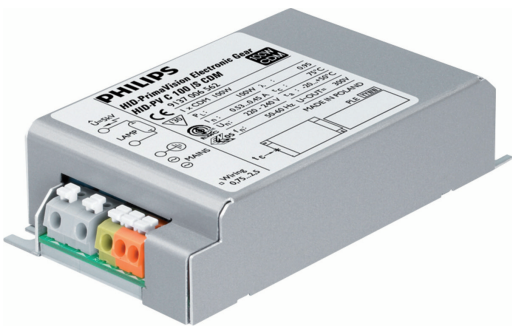

PrimaVision Compact for CDM

HID-PV C 35 /S CDM 220-240V 50/60Hz NG

High-quality, compact and lightweight HID electronic gear for optimal and reliable performance of 20, 35, 50 and 70 W CDM lamps


Product data

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Inrush current width	0.25 ms
Inrush current peak (max.)	26 A
Number of products on MCB (16 A type B) (nom.)	24
Wiring	
Cable length from device to lamp	1.5 m
Connector type	Insert
Temperature	
T-case lifetime (nom.)	80 °C
T-Case maximum (max.)	80 °C
Mechanical and Housing	
Housing	/S
Net Weight (Piece)	0.216 kg
Approval and Application	
Safety standard	EN 61347-2-12

Environmental standard	ISO 14001
Approval marks	CE marking ENEC certificate
CE mark	Yes
Ambient temperature range	-20°C to 55°C
Product Data	
Order product name	HID-PV C 35 /S CDM 220-240V 50/60Hz NG
Full product name	HID-PV C 35 /S CDM 220-240V 50/60Hz NG
Full EOC	872790085962100
Order code	913700652766
Material no. (12 NC)	913700652766
Local order code	PVC035SCDM
Numerator – quantity per pack	1
EAN/UPC – Product/Case	8711500881687
Numerator – packs per outer box	12
EAN/UPC - Case	8727900859621

PrimaVision Compact for CDM

Dimensional drawing



Product	D1	C1	A1	A2	B1	B2
HID-PV C 35 /S CDM 220-240V 50/60Hz NG	4.9 mm	32.2 mm	109.6 mm	98.5 mm	74.4 mm	63.7 mm

