



# Actinic BL TL(-K) / TL-D(-K)

## Actinic BL TL TL 11W/10

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data

General Information		Lamp Current (Nom)	
Cap-Base	G5 [ G5]		0.400 A
Main Application	Reprography (R)	Voltage (Nom)	34 V
Useful Life (Nom)	2000 h	<b>Approval and Application</b>	
<b>Light Technical</b>		Mercury (Hg) Content (Nom)	4.4 mg
Color Code	10	<b>UV</b>	
Color Designation	Actinic	UV-B/UV-A (IEC)	0.2 %
Chromaticity Coordinate X (Nom)	230	UV-A Radiation 100Hr (IEC)	2.0 W
Chromaticity Coordinate Y (Nom)	230	<b>Product Data</b>	
UV Depreciation at 500 h	30 %	Full product code	871150095145827
UV Depreciation at 1000 h	40 %	Order product name	Actinic BL TL TL 11W/10
UV Depreciation at 2000 h	45 %	EAN/UPC - Product	8711500951458
<b>Operating and Electrical</b>		Order code	928000601030
Power (Rated) (Nom)	11.5 W	Numerator - Quantity Per Pack	1


## Actinic BL TL(-K) / TL-D(-K)

Numerator - Packs per outer box	250
Material Nr. (12NC)	928000601030
Net Weight (Piece)	21.000 g

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



### Dimensional drawing

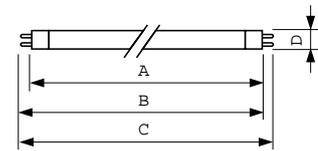

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL TL 11W/10	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

### TL 11W/10

### Photometric data

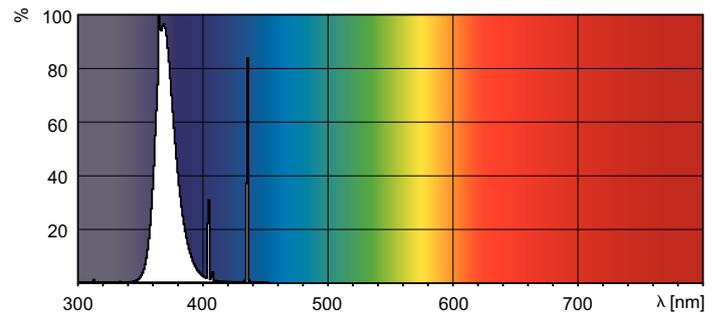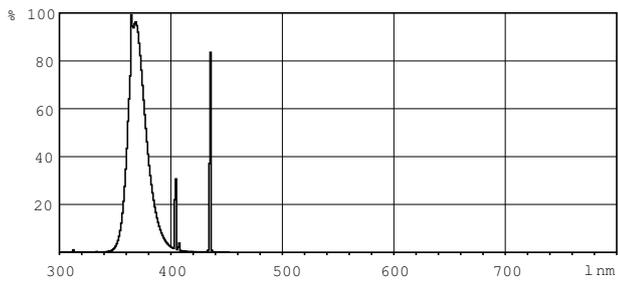

### Lightcolor /10

### Lightcolor /10

