



# TUV T8

## TUV 30W 1SL/25-Latest

TUV T8 lamps are double-ended UV-C 253.7 nm emitting lamps. TUV T8 lamps offer almost constant UV-C output over their complete lifetime. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.

### Product data


| General Information             |                                  | Voltage (Nom)              |                       |
|---------------------------------|----------------------------------|----------------------------|-----------------------|
| Cap-Base                        | G13 [ Medium Bi-Pin Fluorescent] | 102 V                      |                       |
| Main Application                | Disinfection                     | Mechanical and Housing     |                       |
| Useful Life (Nom)               | 9000 h                           | Cap-Base Information       | 2 Pins                |
| System Description              | -                                | Bulb Shape                 | T26 [ T 26mm]         |
| Light Technical                 |                                  | Approval and Application   |                       |
| Color Code                      | TUV                              | Mercury (Hg) Content (Nom) | 2.0 mg                |
| Color Designation               | - [ Not Specified]               | UV                         |                       |
| Depreciation at Useful Lifetime | 12 %                             | UV-C Radiation at 100 hr   | 11.5 W                |
| Operating and Electrical        |                                  | Product Data               |                       |
| Power (Nom)                     | 30 W                             | Full product code          | 871150072620940       |
| Lamp Current (Nom)              | 0.365 A                          | Order product name         | TUV 30W 1SL/25-Latest |

# TUV T8

|                                 |               |
|---------------------------------|---------------|
| EAN/UPC - Product               | 8711500726209 |
| Order code                      | 928039504005  |
| Numerator - Quantity Per Pack   | 1             |
| Numerator - Packs per outer box | 25            |

|                     |              |
|---------------------|--------------|
| Material Nr. (12NC) | 928039504005 |
| Net Weight (Piece)  | 134.900 g    |



## Dimensional drawing



| Product               | D (max) | A (max)  | B (max)  | B (min)  | C (max)  |
|-----------------------|---------|----------|----------|----------|----------|
| TUV 30W 1SL/25-Latest | 28 mm   | 894.6 mm | 901.7 mm | 899.3 mm | 908.8 mm |

TUV TL-D 30W

## Photometric data

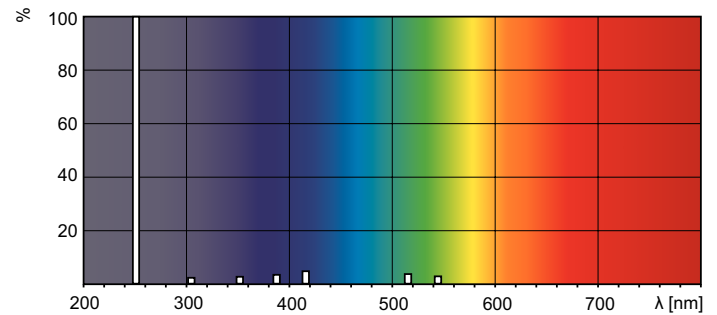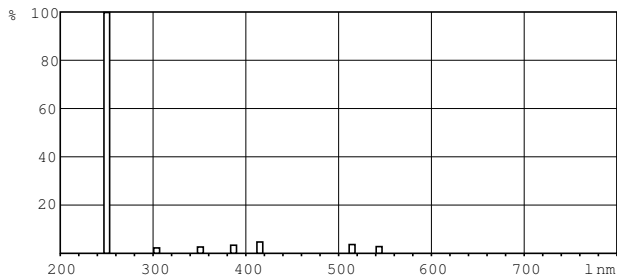

XDPB\_XUTUVTLD-Spectral power distribution B/W

XDPO\_XUTUVTLD-Spectral power distribution Colour

