



# CorePro Plastic LEDcandles & lusters



## CorePro candle ND 5-40W E14 840 B35 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters and are available in multiple color temperatures. LED lamps deliver huge energy savings of up to 80% energy-saving compared with halogen lamps and provide excellent quality of light. By offering a lifetime of 15,000 hours it lowers maintenance costs. The CorePro LED candles and lusters are perfect for your basic lighting needs.

### **Product data**

General Information	
Cap-Base	E14
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Warranty period	2 years
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux	470 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	94.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5 W
Lamp Current (Nom)	44 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.51
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	81 °C


Datasheet, 2025, September 29 data subject to change

# CorePro Plastic LEDcandles & lusters

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	B35
Net Weight (Piece)	0.040 kg
Approval and Application	
Energy Efficiency Class	F
Energy Consumption kWh/1000 h	5 kWh
EPREL Registration Number	453200
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4


Application Conditions		
can it be used in closed luminaires	No	
Product Data		
Order product name	CorePro candle ND 5-40W E14 840	
	B35 FR	
Full product name	CorePro candle ND 5-40W E14 840	
	B35 FR	
Full product code	871951431254800	
Order code	929002968802	
Material Nr. (12NC)	929002968802	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8719514312548	
Numerator - Packs per outer box	10	
EAN/UPC - Case	8719514312555	

# Dimensional drawing




Product	D	С
CorePro candle ND 5-40W E14 840 B35 FR	38 mm	114 mm

# Photometric data




General uniform lighting - CorePro candle ND 5-40W E14 840 B35 FR

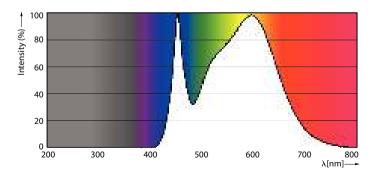

Spectral Power Distribution Colour - CorePro candle ND 5-40W E14 840 B35 FR


# CorePro Plastic LEDcandles & lusters


#### Photometric data



Light Distribution Diagram - CorePro candle ND 5-40W E14 840 B35 FR

#### Lifetime

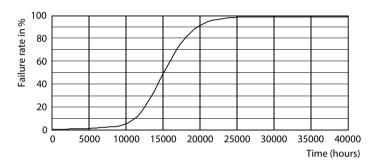



Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro candle ND 5-40W E14 840 B35 FR



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.