

DN065B G4
LED20/830_840_865 19W
D200 RD
929003251432



Ledinaire SlimDownlight, All-in, 19 W, D200 mm, 2000 lm, 3000 K, 4000 K, 6500 K, Beam angle 110°, White, IP20/44

D200 mm, Metal-Plastic, White, Power supply unit (On/Off), All-in, Multi Color Temperature, 2000 lm, 19 W, 105 lm/W, 3000 K, 4000 K, 6500 K, (0.44, 0.403) SDCM≤5, Beam angle 110°, IP20/44 | Finger-protected; wire-protected, splash-proof, IK03 | 0.3 J, Safety class II, Screw connection block 2-pole

General Information

Light source replaceable	No
Driver included	Yes
Lighting Technology	LED
Mounting	Recessed
Value ladder	Value
Warranty period	3 years

Light Technical

Luminous Flux	2,000 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	105 lm/W
Color rendering index (CRI)	80
Light source color	Multi Color Temperature
Optic type	Beam angle 110°
Luminaire light beam spread	110°
Unified glare rating CEN	28
Photobiological safety according to EN 62471	RG0
All-in Type	All-in, Multi Color Temperature

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Input Frequency	50 or 60 Hz
Inrush current	4.92 A
Power Consumption	19 W
Power Factor (Fraction)	0.9
Connection	Screw connection block 2-pole
Number of products on MCB of 16 A type B	55
Protection class IEC	Safety class II
Total harmonic distortion	30 %

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing Material	Metal-Plastic
Reflector material	-
Housing Color	White
Overall length	225 mm
Overall width	225 mm
Overall height	45 mm
Overall diameter	225 mm
Dimensions (Height x Width x Depth)	45 x 225 x 225 mm
Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [0.3 J]
Mounting	Recessed
Net Weight (Piece)	0.365 kg

Approval and Application

Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.7
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.44, 0.403) SDCM≤5
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5

Over Time Performance (IEC Compliant)

Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L65
---	-----

Sustainability Data


Repair class	Repair Class D, this product is not designed to be repaired.
--------------	--

Product Data


Order product name	DN065B G4 LED20/830_840_865 19W D200 RD
Full product name	DN065B G4 LED20/830_840_865 19W D200 RD
Full product code	871951446445200
Order code	929003251432

Material Nr. (12NC)	929003251432
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514464452
Numerator - Packs per outer box	12
EAN/UPC - Case	8719514464469

Dimensional drawing

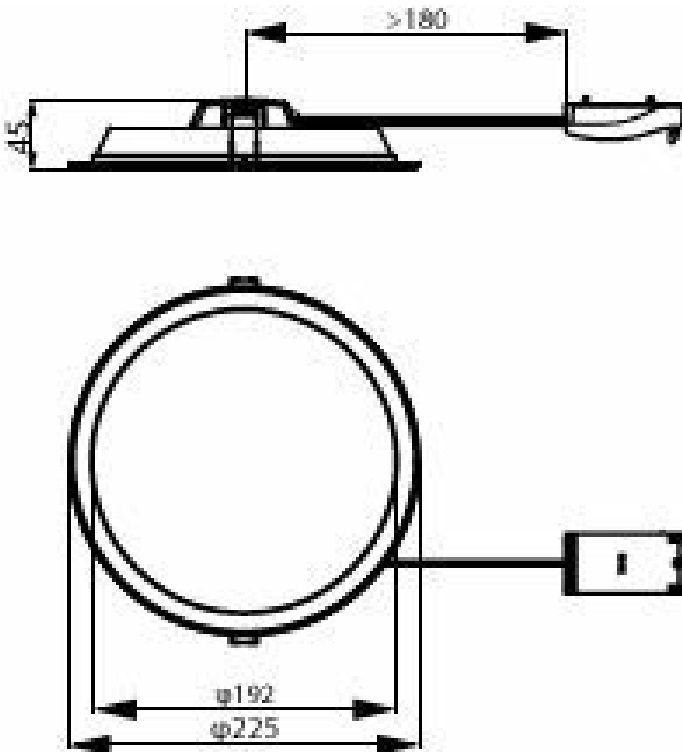

Photometric data

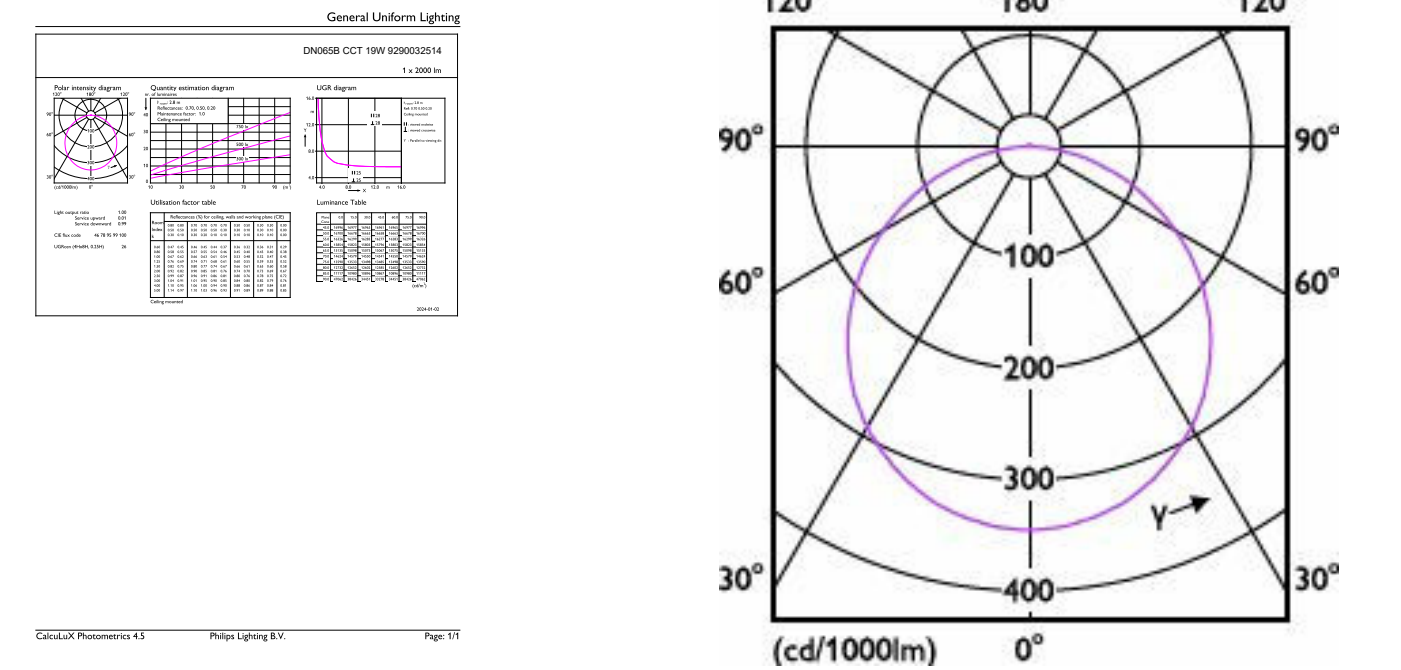

General uniform lighting - DN065B G4 LED20/830_840_865 19W D200 RD

Light Distribution Diagram - DN065B G4 LED20/830_840_865 19W D200 RD

Compatible Accesories

Accessory Image	Accessory Code	Accessory Name	Website
	929003311702	DN065B G4 Trim Accessory D200 BK	Product Website
	929003313102	DN065B G4 Trim Accessory D200 SI	Product Website

Related Documents

Documents and certificates	Document Name	Download
Environmental Product Declaration	EPD-Philips-DN065B-G4-LED20-830-840-865-19W-D200-RD-929003251432-20240730.pdf	Download
Installation Instructions	Downlight_DN065B_G4_7195214_V2_online_All_in-INT.pdf	Download
Photometry and lighting design	Document Name	Download
IES File	DN065B-G4-LED20-CCT-19W-D200-RD-IES.ies	Download

