



CorePro LED PLL



CorePro LED PLL HF 8W 840 4P 2G11

Philips CorePro LED PLL is the ideal uplamping solution for downlights & luminaires in a wide range of general lighting applications. It integrates a LED light source into a traditional fluorescent form factor to offer superb energy savings over a lifetime that's twice as long as fluorescent alternatives.

Product data


General Information		Power Consumption	
Cap-Base	2G11	Power Consumption	8 W
Nominal lifetime	30,000 hour(s)	Lamp Current (Max)	500 mA
Switching Cycle	50,000	Lamp Current (Min)	150 mA
Lighting Technology	LED	Starting Time (Nom)	0.5 s
Flux measurement reference	Sphere	Warm-up time to 60% light	0.5 s
EU RoHS compliant	Yes	Power Factor (Fraction)	0.9
		Voltage (Nom)	20-60 V
		LED alternative to fluorescent lamp power	18 W
		Inrush current at mains	-
		Max. lamp no. on MCB B type 10A - Mains	-
		Max. lamp no. on MCB B type 10A – EM ballast without Comp. Cap.	-
		Max. lamp no. on MCB B type 10A – EM ballast with Comp. Cap.	-
		Max. lamp no. on MCB B type 16A - Mains	-
		Max. lamp no. on MCB B type 16A – EM ballast without Comp. Cap.	-
		Max. lamp no. on MCB B type 16A – EM ballast with Comp. Cap.	-
Light Technical		Temperature	
Color Code	840 [CCT of 4000K]	Ambient temperature range	-20 °C to 45 °C
Beam Angle (Nom)	160 degree(s)		
Luminous Flux	1,000 lm		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	125 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	80		
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Photobiological safety according to EN 62471	RGO		
Operating and Electrical			
Line Frequency	20K-80K Hz		
Input Frequency	20K-80K Hz		

CorePro LED PLL

T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	200 mm
Bulb Shape	PL-L
Approval and Application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	8 kWh



EPREL Registration Number	1370820
Product Data	
Order product name	CorePro LED PLL HF 8W 840 4P 2G11
Full product name	CorePro LED PLL HF 8W 840 4P 2G11
Full product code	871951448678200
Order code	929003578902
Material Nr. (12NC)	929003578902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514486782
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514486799

Dimensional drawing

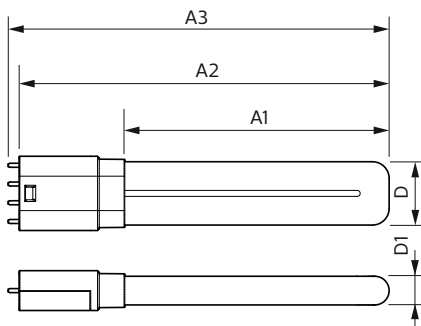

Product	D1	D2	A1	A2	A3
CorePro LED PLL HF 8W 840 4P 2G11	17 mm		155 mm	217 mm	224 mm

Photometric data




Light Distribution Diagram - CorePro LED PLL HF 8W 840 4P 2G11

General uniform lighting - CorePro LED PLL HF 8W 840 4P 2G11

CorePro LED PLL

Photometric data

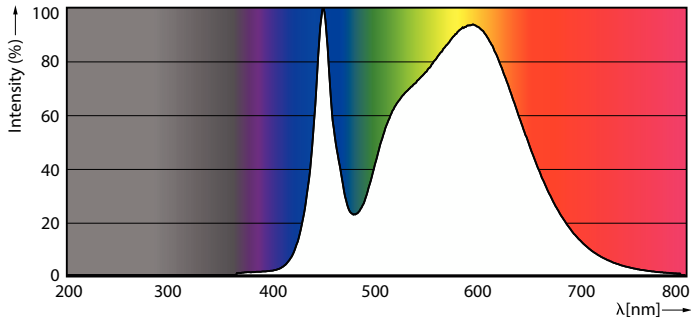


Spectral Power Distribution Colour - CorePro LED PLL HF 8W 840 4P 2G11


Lifetime




Life Expectancy Diagram - CorePro LED PLL HF 8W 840 4P 2G11

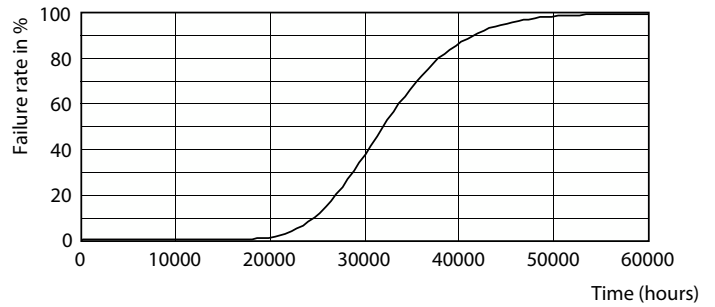

Life Expectancy Diagram - CorePro LED PLL HF 8W 840 4P 2G11

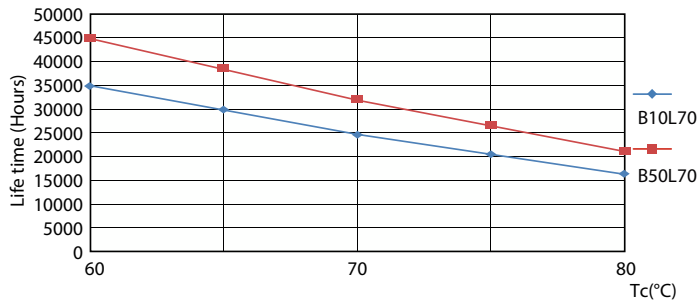


Life Expectancy Diagram - CorePro LED PLL HF 8W 840 4P 2G11

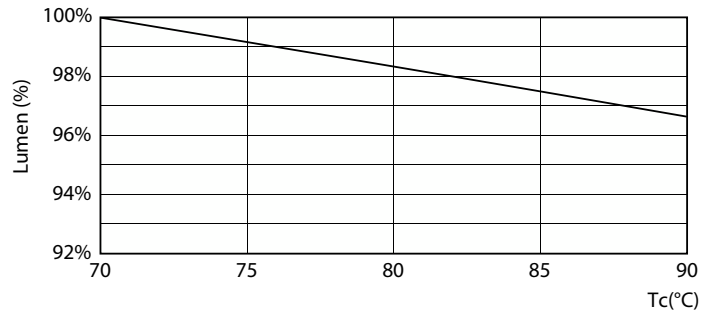

Lumen Maintenance Diagram - CorePro LED PLL HF 8W 840 4P 2G11

CorePro LED PLL

Lifetime

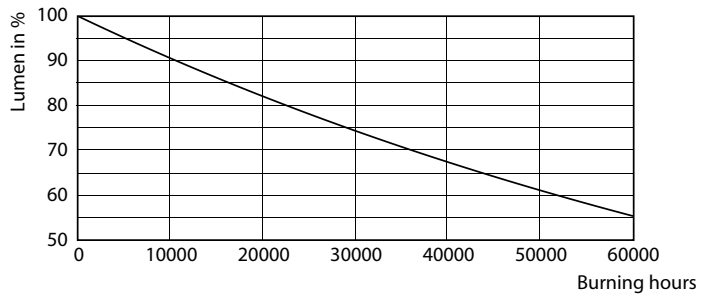

Lumen Maintenance Diagram - CorePro LED PLL HF 8W 840 4P 2G11

