



CorePro LED capsule MV



CorePro LEDcapsule 3.7-40W ND G9 830

CorePro, LED, G9, 40 W, G9, 3000 K, 470 lm, CRI 80, 15000 hour(s), Plastic

The LED specialties deliver a high quality light to make themselves to be a true replacement of halogen specialty lamp (such as G9 and R7S). It is particularly suit for task lighting in hotel and restaurants, and ideal for decorative and ambient application. LEDspecialty products deliver huge energy saving and minimize maintenance costs, without any compromise on light quality.

Product data

| General Information | |
|------------------------------------|--------------------|
| Cap-Base | G9 |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| Warranty period | 2 years |
| Light Technical | |
| Color Code | 830 [CCT of 3000K] |
| Beam Angle (Nom) | 320 degree(s) |
| Luminous Flux | 470 lm |
| Color Designation | White (WH) |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 127 lm/W |
| Color Consistency | <6 |


| Color rendering index (CRI) | 80 |
|--|-------------|
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Photobiological safety according to EN 62471 | RG0 |
| Operating and Electrical | |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 3.7 W |
| Lamp Current (Nom) | 32 mA |
| Wattage Equivalent | 40 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.5 |
| Voltage (Nom) | 220-240 V |

CorePro LED capsule MV

| Temperature | |
|---|----------|
| T-Case Maximum (Nom) | 105 °C |
| Controls and Dimming | |
| Dimmable | No |
| Mechanical and Housing | |
| Bulb Finish | Frosted |
| Bulb Material | Plastic |
| Bulb Shape | G9 |
| Net Weight (Piece) | 0.009 kg |
| Approval and Application | |
| Energy Efficiency Class | E |
| Suitable For Accent Lighting | No |
| Energy Consumption kWh/1000 h | 4 kWh |
| EPREL Registration Number | 1932581 |
| EU RoHS compliant | Yes |
| EyeComfort | Yes |
| Flickering value (PstLM) - Flickering value as per 1 EN 61000-3-3 | |



| Stroboscopic effect visibility measure (SVM) | 0.4 |
|--|--------------------------------------|
| Ambient temperature range | -20 to +45 °C |
| Application Conditions | |
| can it be used in closed luminaires | No |
| Product Data | |
| Order product name | CorePro LEDcapsule 3.7-40W ND G9 830 |
| Full product name | CorePro LEDcapsule 3.7-40W ND G9 830 |
| Full product code | 872016930187000 |
| Order code | 929003790902 |
| Material Nr. (12NC) | 929003790902 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8720169301870 |
| Numerator - Packs per outer box | 12 |
| EAN/UPC - Case | 8720169301887 |

Dimensional drawing

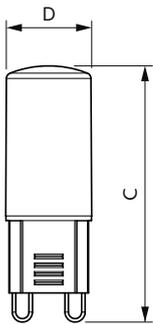

| Product | D | C |
|--------------------------------------|-------|-------|
| CorePro LEDcapsule 3.7-40W ND G9 830 | 16 mm | 52 mm |

Photometric data

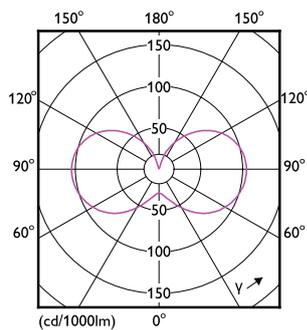


General uniform lighting - CorePro LEDcapsule 3.7-40W ND G9 830

Light Distribution Diagram - CorePro LEDcapsule 3.7-40W ND G9 830


CorePro LED capsule MV

Photometric data

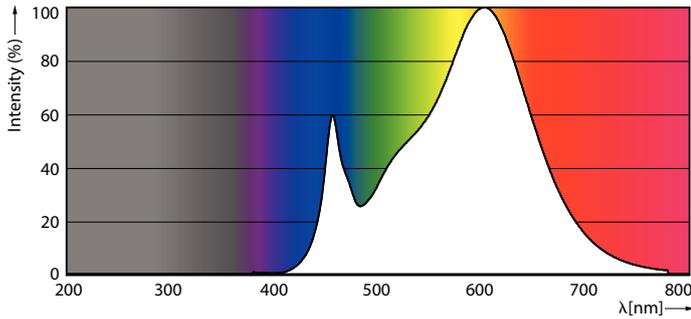


Spectral Power Distribution Colour - CorePro LEDcapsule 3.7-40W ND G9 830

Lifetime

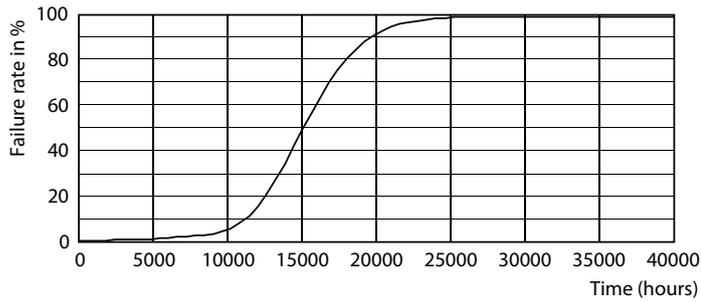

Life Expectancy Diagram

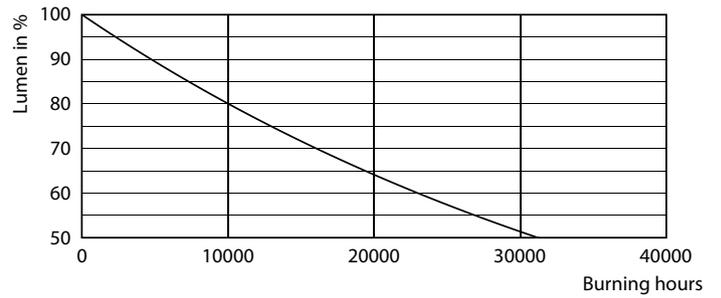

Lumen Maintenance Diagram - CorePro LEDcapsule 3.7-40W ND G9 830

