



MASTER LED tube EM/Mains T8 with Recycled Plastic



MAS LEDtube 1200mm UO 13.5W 830 T8 EELC

MASTER, LEDtube, T8, EM/Mains, 1200 mm, 13.5 W, 36W TL-D, 3000 K, 2300 lm, CRI 80, 75000 hour(s)

MASTER, LEDtube, T8, EM/Mains, 1200 mm, 13.5 W, LED alternative to 36W TL-D, 3000 K, 2300 lm, CRI 80, 75000 hour(s), 170 lm/W, EEL C, G13 Rotatable end-cap, Beam angle 160 degree(s), Plastic, 40 %, 1200 mm, RGO, SDCM 6, PF 0.9, IP20, SVM 0.1, PstLM 0.1

Product data

General Information		Operating and Electrical	
Cap-Base	G13 Rotatable end-cap	Luminous Efficacy (rated) (Nom)	170 lm/W
Nominal lifetime	75,000 hour(s)	Color Consistency	<6
Switching Cycle	200,000	Color rendering index (CRI)	80
Lighting Technology	LEDtube	LLMF At End Of Nominal Lifetime (Nom)	70 %
Flux measurement reference	Sphere	Photobiological safety according to EN 62471	RGO
Warranty period	5 years		
Light Technical		Input Frequency	50 to 60 Hz
Color Code	830 [CCT of 3000K]	Power Consumption	13.5 W
Beam Angle (Nom)	160 degree(s)	Lamp Current (Max)	69 mA
Luminous Flux	2,300 lm	Lamp Current (Min)	56 mA
Color Designation	White (WH)	Starting Time (Nom)	0.5 s
Correlated Color Temperature (Nom)	3000 K	Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.9

MASTER LED tube EM/Mains T8 with Recycled Plastic

Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	36W TL-D
Inrush current at mains	7.4
Max. lamp no. on MCB B type 10A – Mains	100
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	100
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	15
Max. lamp no. on MCB B type 16A – Mains	160
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	160
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	25
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	1,200 mm
Bulb Shape	T8
Net Weight (Piece)	0.220 kg

Approval and Application

Energy Efficiency Class	C
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate ENEC certificate

Energy Consumption kWh/1000 h	14 kWh
EPREL Registration Number	2571899
CE mark	Yes
EU RoHS compliant	Yes
LED Innovations	UltraEfficient
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	0.1
Stroboscopic effect visibility measure (SVM)	0.1
Ambient temperature range	-20 to +45 °C
Post-consumer recycled plastic material ratio	40 %

Application Conditions

can it be used in closed luminaires	Yes
Wireless Technology	Not applicable


Sustainability Data

Sustainability rating	Signify Circle
Product non-virgin material ratio	26.8 %

Product Data

Order product name	MAS LEDtube 1200mm UO 13.5W 830 T8 EELC
Full product name	MAS LEDtube 1200mm UO 13.5W 830 T8 EELC
Full product code	872016938793500
Order code	929004241802
Material Nr. (12NC)	929004241802
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169387935
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169387942



Dimensional drawing

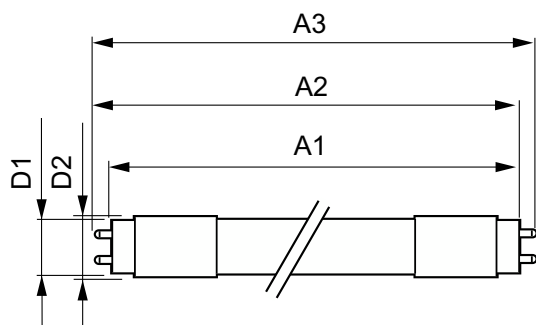

Product	D1	D2	A1	A2	A3
MAS LEDtube 1200mm UO 13.5W 830 T8 EELC	25.8 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm


MASTER LED tube EM/Mains T8 with Recycled Plastic

Photometric data

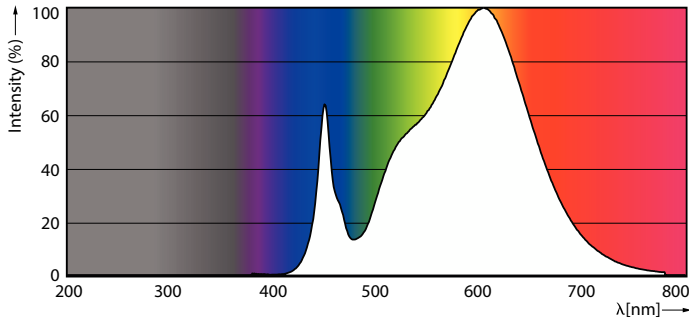


Spectral Power Distribution Colour - MAS LEDtube 1200mm UO 13.5W 830 T8 EELC

Light Distribution Diagram - MAS LEDtube 1200mm UO 13.5W 830 T8 EELC




General uniform lighting - MAS LEDtube 1200mm UO 13.5W 830 T8 EELC

Lifetime

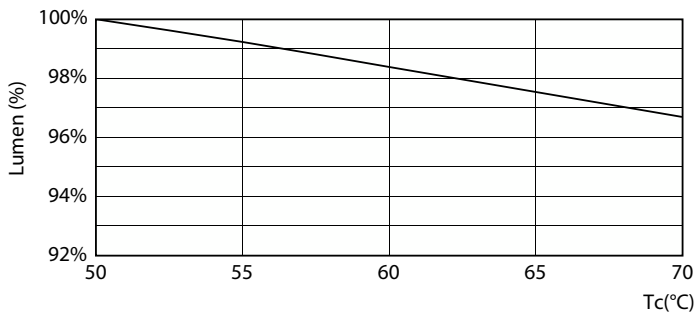

Lumen Maintenance Diagram - MAS LEDtube 1200mm UO 13.5W 830 T8 EELC

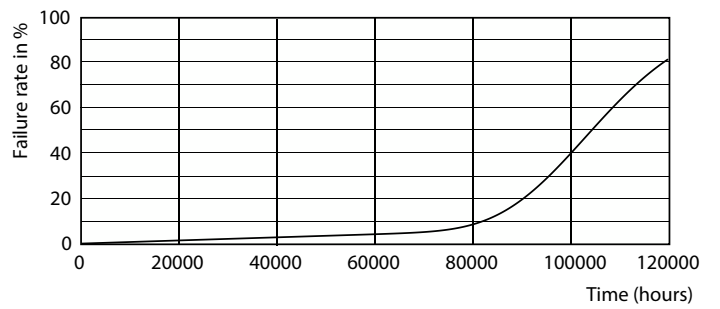

Life Expectancy Diagram

MASTER LED tube EM/Mains T8 with Recycled Plastic

Lifetime



Lumen Maintenance Diagram - MAS LEDtube 1200mm UO 13.5W 830 T8 EELC

Life Expectancy Diagram



Life Expectancy Diagram

