



# MASTER VALUE LED spot MV

## MAS LED spot VLE D 3.7-50W GU10 927 36D

MASTER Value, LED, PAR16, 50 W, GU10, 2700 K, 355 lm, CRI 90, 25000 hour(s), Glass

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data

General Information		Warranty period	5 years
Cap-Base	GU10		
Nominal lifetime	25,000 hour(s)		
Switching Cycle	50,000		
Lighting Technology	LED		
Flux measurement reference	Narrow Cone		
Light Technical			
Color Code	927 [CCT of 2700K]		
Beam Angle (Nom)	36 degree(s)		
Luminous Flux	355 lm		
Luminous Intensity (Nom)	750 cd		

# MASTER VALUE LED spot MV

Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	95 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	355 lm
Photobiological safety according to EN 62471	RG1

## Operating and Electrical

Input Frequency	50 to 60 Hz
Power Consumption	3.7 W
Lamp Current (Nom)	27 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	220-240 V

## Temperature

T-Case Maximum (Nom)	66 °C
----------------------	-------

## Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

## Mechanical and Housing

Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	PAR16
Net Weight (Piece)	0.041 kg

## Approval and Application

Energy Efficiency Class	E
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	2150475
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1

Stroboscopic effect visibility measure (SVM)	0.4
--	-----

Ambient temperature range	-20 to +45 °C
---------------------------	---------------


## Application Conditions

can it be used in closed luminaires	No
-------------------------------------	----

## Product Data

Order product name	MAS LED spot VLE D 3.7-50W GU10 927 36D
Full product name	MAS LED spot VLE D 3.7-50W GU10 927 36D
Full product code	872016939920400
Order code	929004247902
Material Nr. (12NC)	929004247902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169399204
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169399211



## Dimensional drawing



Product	D	C
MAS LED spot VLE D 3.7-50W GU10 927 36D	50 mm	54 mm


# MASTER VALUE LED spot MV

## Photometric data

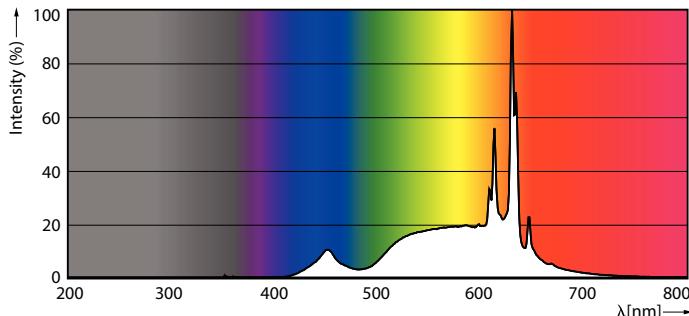


Spectral Power Distribution Colour - MAS LED spot VLE D 3.7-50W GU10 927 36D

Accent Lighting Spots - MAS LED spot VLE D 3.7-50W GU10 927 36D




Light Distribution Diagram - MAS LED spot VLE D 3.7-50W GU10 927 36D

## Lifetime

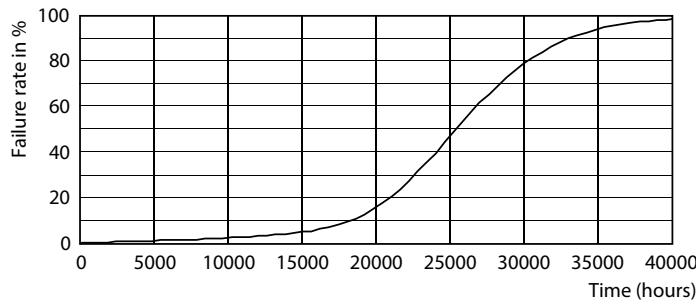

Life Expectancy Diagram

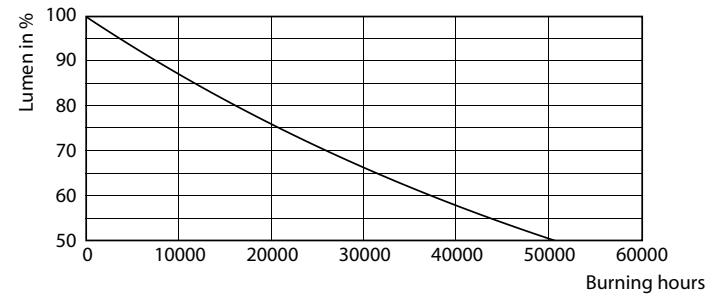

Lumen Maintenance Diagram - MAS LED spot VLE D 3.7-50W GU10 927 36D

## MASTER VALUE LED spot MV



© 2026 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

[www.lighting.philips.com](http://www.lighting.philips.com)  
2026, January 14 - data subject to change