



Downlight DN060B

DN060B LED18S/830 PSU WH

LED Module, system flux 1800 lm - 830 warm white - Power supply unit - White

The LEDINAIRE range contains a selection of popular off-the-shelf LED luminaires that come with the high Philips quality levels at a competitive price. Reliable, energy-efficient and affordable – just what you need.

Product data

General Information		Operating and Electrical	
Lamp family code	LED18S [LED Module, system flux 1800 lm]	Constant light output	No
Beam angle of light source	90 x 90 °	Number of products on MCB of 16 A type B	48
Light source color	830 warm white	RoHS mark	RoHS mark
Light source replaceable	No	Input Voltage	220-240 V
Number of gear units	1 unit	Input Frequency	50 to 60 Hz
Gear	-	Control signal voltage	-
Driver/power unit/transformer	Power supply unit	Inrush current	17.2 A
Driver included	Yes	Inrush time	0.0016 ms
Optic type	Symmetrical	Power Factor (Min)	0.9
Luminaire light beam spread	10°	Controls and Dimming	
Connection	Push-in connector 2-pole	Dimmable	No
Cable	-	Mechanical and Housing	
Protection class IEC	Safety class I	Housing Material	Metal/Plastic
Glow-wire test	Temperature 650 °C, duration 5 s	Reflector material	Steel
Flammability mark	-	Optic material	Polycarbonate
CE mark	CE mark		
ENEC mark	-		
Warranty period	3 years		

Downlight DN060B

Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Optical cover/lens finish	Opal
Overall height	120 mm
Overall diameter	233 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux	1800 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM <5
Initial input power	18 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	1.50 %
-------------------------------	--------

Median useful life L70B50	30000 h
Median useful life L80B50	20000 h
Median useful life L90B50	10000 h

Application Conditions


Ambient temperature range	0 to +35 °C
Suitable for random switching	Not applicable

Product Data

Full product code	871016330661299
Order product name	DN060B LED18S/830 PSU WH
EAN/UPC - Product	8710163306612
Order code	911401531931
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	911401531931
Net Weight (Piece)	0.500 kg



Dimensional drawing

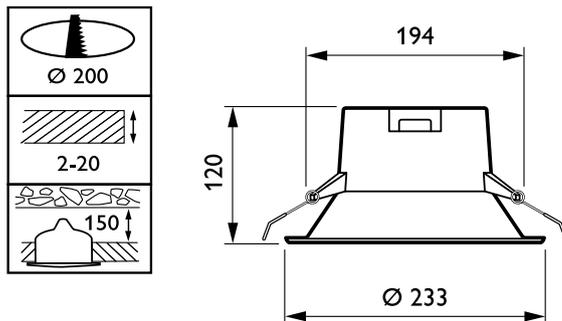

SmartBright LED DN060B-DN063B

