



### Main

|                      |                  |
|----------------------|------------------|
| Range                | TeSys            |
| Product name         | TeSys GV2        |
| Device short name    | GV2P             |
| Device application   | Motor            |
| Trip unit technology | Thermal-magnetic |

### Complementary

|   |   |
|---|---|
| Poles description                                   | 3P  |
| Network type  | AC  |
| Utilisation category                                | AC-3 conforming to IEC 60947-4-1<br>Category A conforming to IEC 60947-2  |
| Network frequency                                   | 50/60 Hz conforming to IEC 60947-4-1  |
| Fixing mode   | Clipped on 35 mm symmetrical DIN rail<br>Screwed on panel (with 2 x M4 screws)  |
| Operating position                                  | Any position  |
| Motor power kW                                      | 0.75 kW at 400/415 V AC 50/60 Hz<br>1.1 kW at 500 V AC 50/60 Hz<br>1.5 kW at 690 V AC 50/60 Hz  |
| Breaking capacity                                   | 100 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 230/240 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 400/415 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2<br>8 kA Icu at 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ics] rated service short-circuit breaking capacity | 100 % at 230/240 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 440 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 500 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 690 V AC 50/60 Hz conforming to IEC 60947-2<br>100 % at 400/415 V AC 50/60 Hz conforming to IEC 60947-2                        |
| Control type  | Rotary knob   |
| [In] rated current                                  | 2.5 A   |
| Thermal protection adjustment range                 | 1.6...2.5 A   |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|   |   |
|---|---|
| Magnetic tripping current                   | 33.5 A  |
| [Ue] rated operational voltage              | 690 V AC 50/60 Hz conforming to IEC 60947-2   |
| [Ui] rated insulation voltage               | 690 V AC 50/60 Hz conforming to IEC 60947-2   |
| [Ith] conventional free air thermal current | 2.5 A conforming to IEC 60947-4-1   |
| [Uimp] rated impulse withstand voltage      | 6 kV conforming to IEC 60947-2  |
| Power dissipation per pole                  | 2.5 W   |
| Mechanical durability                       | 100000 cycles   |
| Electrical durability                       | 100000 cycles for AC-3 at 440 V   |
| Operating rate                              | 25 cyc/h  |
| Rated duty                                  | Continuous conforming to IEC 60947-4-1  |
| Connections - terminals                     | Screw clamp terminals 2 cable(s) 1...6 mm <sup>2</sup> solid<br>Screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> flexible without cable end<br>Screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible with cable end |
| Tightening torque                           | 1.7 N.m on screw clamp terminals  |
| Suitability for isolation                   | Yes conforming to IEC 60947-1   |
| Phase failure sensitivity                   | Yes conforming to IEC 60947-4-1   |
| Height                                      | 89 mm   |
| Width                                       | 45 mm   |
| Depth                                       | 97 mm   |

## Environment

|                                       |   |
|---------------------------------------|---|
| Standards                             | NF C 63-650<br>UL 508<br>VDE 0113<br>CSA C22.2<br>IEC 60947-4-1<br>NF C 79-130<br>NF C 63-120<br>IEC 60947-2<br>VDE 0660<br>EN 60204<br>IEC 60947-1 |
| Product certifications                | TSE<br>CCC<br>EAC<br>LROS (Lloyds register of shipping)<br>ATEX<br>GL<br>EZU<br>UL<br>BV<br>RINA<br>DNV<br>CSA<br>UL 508 type E                     |
| Protective treatment                  | TH  |
| IP degree of protection               | IP20 conforming to IEC 60529  |
| IK degree of protection               | IK04  |
| Ambient air temperature for operation | -20...60 °C   |
| Ambient air temperature for storage   | -40...80 °C   |
| Fire resistance                       | 960 °C conforming to IEC 60695-2-1  |
| Operating altitude                    | 2000 m  |

## Offer Sustainability

|                          |   |
|--------------------------|---|
| Sustainable offer status | Green Premium product   |
| RoHS (date code: YYWW)   | Compliant - since 0631 - Schneider Electric declaration of conformity<br><a href="#">Schneider Electric declaration of conformity</a> |
| REACH                    | Reference contains SVHC above the threshold - Go to CaP for more details<br><a href="#">Go to CaP for more details</a>                |

---

|                                  |  |
|----------------------------------|--|
| Product environmental profile    | Available<br><a href="#">Product Environmental Profile</a> |
| Product end of life instructions | Need no specific recycling operations                      |

---

### Contractual warranty

---

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

---

Thermal-Magnetic Tripping Curves for GV2ME and GV2P

Average Operating Times at 20 °C Related to Multiples of the Setting Current



- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current Limitation on Short-Circuit for GV2ME and GV2P (3-Phase 400/415 V))

Dynamic Stress

I<sub>peak</sub> = f (prospective I<sub>sc</sub>) at 1.05 U<sub>e</sub> = 435 V



- 1 Maximum peak current
- 2 24-32 A
- 3 20-25 A
- 4 17-23 A
- 5 13-18 A
- 6 9-14 A
- 7 6-10 A
- 8 4-6.3 A
- 9 2.5-4 A
- 10 1.6-2.5 A
- 11 1-1.6 A
- 12 Limit of rated ultimate breaking capacity on short-circuit of GV2ME (14, 18, 23, and 25 A ratings).

**Thermal Limit on Short-Circuit for GV2P**

Thermal Limit in  $kA^2s$  in the Magnetic Operating Zone


Sum of  $I^2dt = f$  (prospective Isc) at 1.05 Ue = 435 V




- 1 24-32 A
- 2 20-25 A
- 3 17-23 A
- 4 13-18 A
- 5 9-14 A
- 6 6-10 A
- 7 4-6.3 A
- 8 2.5-4 A
- 9 1.6-2.5 A
- 10 1-1.6 A

GV2P


On rail AM1 DE200, ED200 (35 x 15)




Panel mounted



On pre-slotted plate AM1 PA



Adapter plate GK2AF01

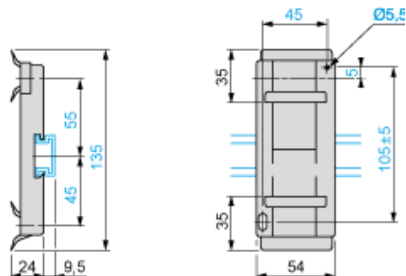

Combination GV2P + TeSys d contactor



| GV2P + | LC1D09...D18 | LC1D25 and D32 |
|--------|--------------|----------------|
| b      | 176.4        | 186.8          |
| c1     | 100.1        | 106.4          |


|        |              |                |
|--------|--------------|----------------|
| GV2P + | LC1D09...D18 | LC1D25 and D32 |
| c      | 105.6        | 111.9          |
| d1     | 95           | 95             |
| d      | 100.5        | 100.5          |

## Mounting

Mounting of External Operator GV2APN01, GV2APN02 or GV2APN04 for Motor Circuit Breakers GV2P




Door cut-out

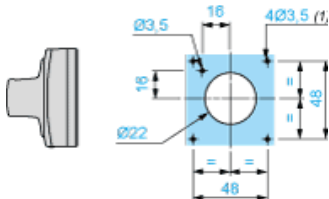


(1) For IP65 only.

Mounting of External Operator GVAPH02 for Motor Circuit Breakers GV2P

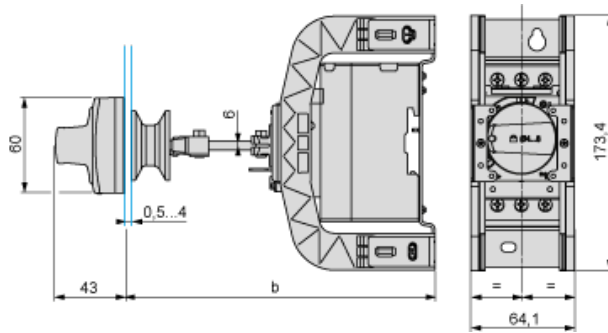

|                              | a       |         | b       |         |
|------------------------------|---------|---------|---------|---------|
|                              | Minimum | Maximum | Minimum | Maximum |
| GV2APN..                     | 140     | 250     | –       | –       |
| GV2APN.. + GVAPH02           | –       | –       | 151     | 250     |
| GV2APN.. + GVAPK11           | 250     | 434     | –       | –       |
| GV2APN.. + GVAPH02 + GVAPK11 | –       | –       | 250     | 445     |

Door cut-out

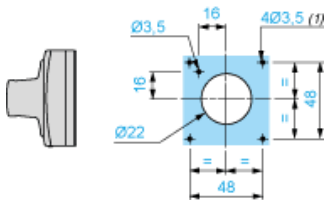

(1) For IP65 only.



GV2P••

