



MASTER TL5 High Output 90 De Luxe

MASTER TL5 HO 90 De Luxe 49W/950 1SL

This TL5 High Output lamp (tube diameter 16 mm) has excellent color rendering (CRI > 90). This means that colors are presented in a natural way, making them appear rich, deep and enhanced as they do in daylight. Application areas are places where color rendering is key, e.g. the printing industry, libraries, museums, hospitals and shops (jewelry, flowers, clothing, textile, leather, carpets).

Product data

• General Characteristics

Cap-Base	G5
Bulb	T5 [16 mm]
Life to 50% fail	24000 hr
Preheat EL,3h	
Life to 10% fail	19000 hr
Preheat EL,3h	
LSF HF Preheat	84 %
20000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

• Light Technical Characteristics

Color Code	950 [CCT of 5000K]
Color Rendering Index	92 Ra8
Color Designation (text)	Daylight
Color Temperature	5200 K
Chromaticity Coordinate X	340 -
Chromaticity Coordinate Y	352 -
Luminous Efficacy EL Top, 35°C	85 Lm/W

Luminance Average EL Top, 35°C	1.8 cd/cm ²
Luminous Flux Lamp EL 35°C	4200 Lm
Luminance Average EL 25°C	1.7 cd/cm ²
Lum Efficacy Rated HF 25°C	74 Lm/W
Lum Efficacy Rated HF 35°C	85 Lm/W
LLMF HF 20000h Rated	90 %
LLMF HF 16000h Rated	91 %
LLMF HF 12000h Rated	92 %
LLMF HF 8000h Rated	93 %
LLMF HF 6000h Rated	94 %
LLMF HF 4000h Rated	95 %
LLMF HF 2000h Rated	96 %
Luminous Flux EL 25°C, Rated	3700 Lm
Luminous Flux EL 25°C, Nominal	3700 Lm
Design Temperature	35 C

• Electrical Characteristics

Lamp Wattage	49 W
Lamp Voltage EL 25°C	195 V
Lamp Current EL 25°C	0.255 A



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER TL5 High Output 90 De Luxe

Dimmable	Yes
Lamp Wattage EL 35°C	49.3 W
Lamp Current EL 35°C	0.260 A
Lamp Voltage EL 35°C	191 V
Lamp Wattage EL 25°C, Rated	49.7 W
Lamp Wattage EL 25°C, Nominal	49 W

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg

• Measuring Conditions

Calibration Current	0.255 A
HF Generator Rated Voltage	390 V
Resistor	765 ohm



• Product Dimensions

Base Face to Base Face A	1449.0 (max) mm
Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

• Product Data

Order code	927991595024
Full product code	927991595024
Full product name	MASTER TL5 HO 90 De Luxe 49W/950 1SL
Order product name	MASTER TL5 HO 90 De Luxe 49W/950 1SL/20
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8711500890627
Bar code on outerbox - EAN3	8727900895216
Logistic code(s) - 12NC	927991595024
ILCOS code	FDH-49/50/1A-L/P-G5-16/1450
Net weight per piece	128.700 gr

Dimensional drawing


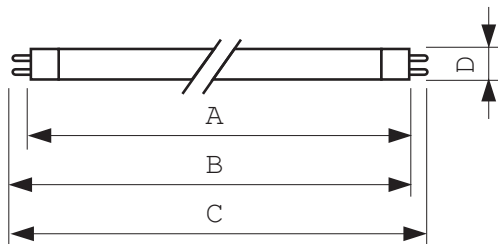


G5

G5, T5

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO 49W/950	1449.0	1453.7	1456.1	1463.2	17

Photometric data

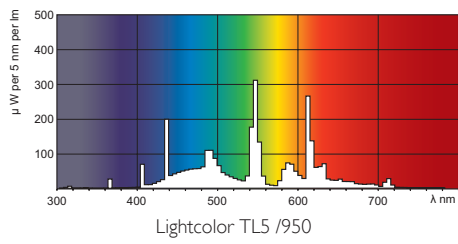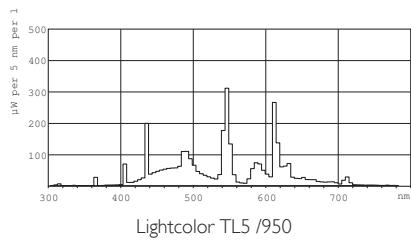

© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, August 4
data subject to change