



MASTER SON PIA Plus

MASTER SON PIA Plus 150W/220 E40 1SL

High Pressure Sodium lamp with opalized ovoid outer bulb, high output and long reliable lifetime

Product data

• General Characteristics

System Description	External Ignitor
Cap-Base	E40
Bulb	BD90 [BD 90mm]
Bulb Finish	Coated
Operating Position	any [Any or Universal (U)]
Life to 5% failures	20500 hr
Life to 10% failures	24000 hr
Life to 20% failures	28000 hr
Life to 50% failures	36000 hr
LSF EM 2000h Rated, 12h cycle	100 %
LSF EM 4000h Rated, 12h cycle	99 %
LSF EM 6000h Rated, 12h cycle	99 %
LSF EM 8000h Rated, 12h cycle	99 %
LSF EM 12000h Rated, 12h cycle	99 %
LSF EM 16000h Rated, 12h cycle	98 %
LSF EM 20000h Rated, 12h cycle	95 %

• Light Technical Characteristics

Color Code	220 [CCT of 2000K]
Color Rendering Index	25 (max) Ra8
Color Temperature	2000 K
Luminous Flux EM 25°C, Rated	16100 Lm
Lum Efficacy Rated EM 25°C	108 Lm/W
Luminance Average EM	11 cd/cm ²

LLMF EM 2000h Rated	99 %
LLMF EM 4000h Rated	98 %
LLMF EM 6000h Rated	97 %
LLMF EM 8000h Rated	96 %
LLMF EM 12000h Rated	96 %
LLMF EM 16000h Rated	95 %
LLMF EM 20000h Rated	94 %
Chromaticity Coordinate X	535 -
Chromaticity Coordinate Y	420 -

• Electrical Characteristics

Lamp Wattage	150 W
Lamp Wattage EM 25°C, Nominal	150.0 W
Lamp Wattage EM 25°C, Rated	154.0 W
Lamp Voltage	100 V
Lamp Current EM	1.8 A
Ignition Time	5 (max) s
Run-up time 90%	4 (max) min
Dimmable	Yes
Re-ignition Time [sec]	180 (max) s
Ratio scotopic/photopic lumens	0.55 -

PHILIPS

MASTER SON PIA Plus

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	15 mg
Energy consumption kWh/1000h	169 kWh

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Bulb Temperature	350 (max) C

• Product Dimensions

Overall Length C	227 (max) mm
Diameter D	91 (max) mm

• Product Data



Order code	928151409827
Full product code	928151409827
Full product name	MASTER SON PIA Plus 150W/220 E40 1SL
Order product name	MASTER SON PIA Plus 150W/220 E40 1SL/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500182289
Bar code on outerbox - EAN3	8711500182296
Logistic code(s) - 12NC	928151409827
ILCOS code	SE-150-H/S-E40
Net weight per piece	0.156 kg

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

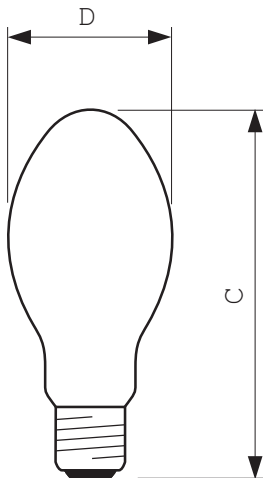


E40

MASTER SON PIA Plus 150W/220 E40 1SL

Product	C (Max)	D (Max)
SON PIA Plus 150W/220 E40	227	91

Photometric data

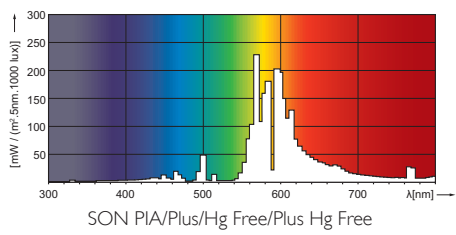

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, August 29
data subject to change