

ELA 600 PR

Part number 3116604



Description

LED recessed luminaire, consisting of:

- Extruded aluminium profile, powder-coated mounting frame
- Prismatic technopolymer diffuser
- UGR<19
- Remote ON/OFF driver included

Options:

- Installation kit for ceiling mounting available
- Emergency 3h
- Dimmable DALI options available. Consult factory
- Dimmable 1/10V ballast available. Consult factory
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Product data

ETIM Group:	EG000027	ETIM Class:	EC001744
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	4600	Luminaire lumen output [lm]:	3988
Luminaire wattage [W]:	32 W	Luminous efficacy [lm/W]:	125
CRI:	80	Kelvin:	4000
Colour / Finish:	WH-87 / White / Textured	IP degree of protection:	IP40
IK-J-xxIP:	IK06 1J xx3	Insulation class:	II
Optic:	SYMMETRIC EXTRA-WIDE	Net weight [kg]:	2.858

Mechanical features

Shape:	SQUARE > 300 MM	Housing material:	PAINTED STEEL
Diffuser material:	PLASTIC	Glow wire test [°C]:	750 °C

Electrical features

Voltage type:	AC	Power factor / COS Φ:	>0.9
Inrush current [A/μs]:	27 / 154		


Installation

Application area:	Indoor	Mounting type:	Ceiling recessed
Min. ambient temperature [°C]:	-30	Max. ambient temperature [°C]:	35

Light features

MacAdam:	5	Lumen maintenance:	L80B10@57000h
Distribution of light emission:	Direct	UGR max.:	18.0

Photometric data

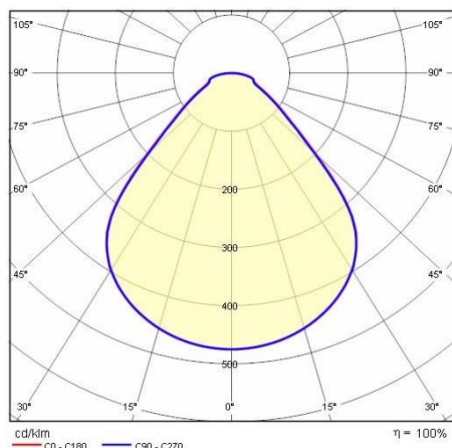

Control gear

ELA 600




19-02565
Driver 36 W DALI




19-02566
Driver 36 W 1-10 V push

Optional accessories

ELA 600



19-02567
kit EM3P



3116983
Ceiling kit
 W/H-RAL9010 / White RAL9010