



A+ 200 C/EW

Part number 3111276

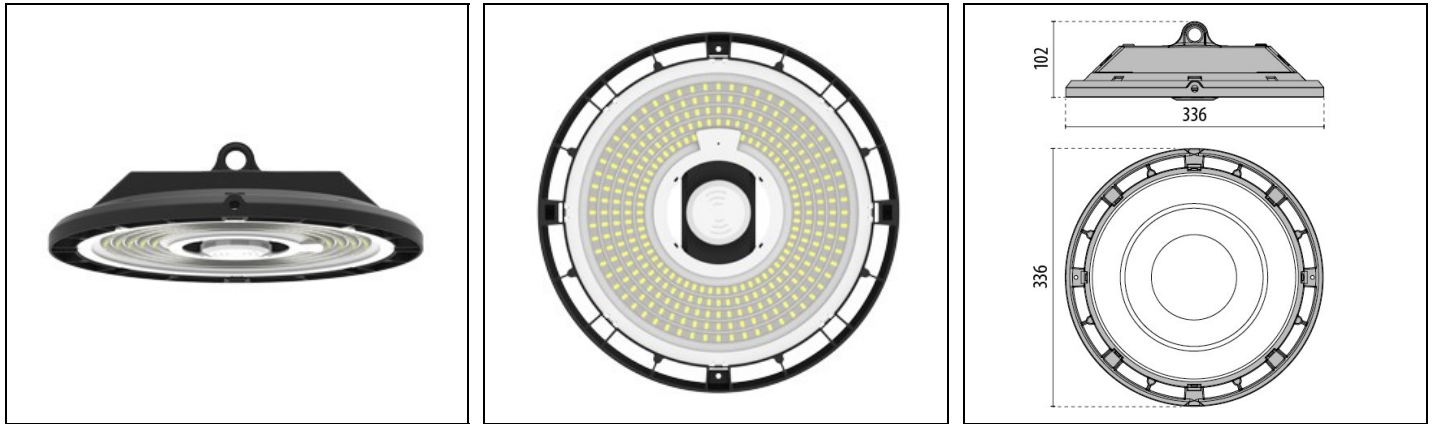

Description

Suspended LED luminaire for indoor and outdoor industrial applications, comprising:

- Die-cast aluminium housing and trim polyester powder coat finish, coat finish prior chemical conversion surface treatment
- UV and heat stabilised, technopolymer diffuser with integral custom moulded optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- 4000K multi-chip LED board
- Stainless steel locking hardware
- Suspension hook in painted aluminium with safety screw
- Complete with cable H05RN-F
- Built-in driver

Options:

- Painted steel bracket
- Infrared remote control for sensor module
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Product data

ETIM Group:	EG000027	ETIM Class:	EC001716
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	32000	Luminaire lumen output [lm]:	27222
Luminaire wattage [W]:	200 W	Luminous efficacy [lm/W]:	136
CRI:	80	Kelvin:	4000
Colour / Finish:	BK-RAL9005 / Black RAL9005 / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK08 5J xx5	Insulation class:	I
Optic:	CIRCULAR EXTRA-WIDE	Net weight [kg]:	3.14

Mechanical features

Shape:	ROUND > 300 MM	Housing material:	ALUMINIUM
Glow wire test [°C]:	960 °C		

Electrical features

Voltage type:	AC/DC	Power factor / COS Φ:	>0.9
Surge protection Common [kV]:	10.0	Surge protection Differential [kV]:	6.0
Inrush current [A/μs]:	70 / 316		


Installation

Application area:	Indoor	Mounting type:	Hi / low-bay
Min. ambient temperature [°C]:	-40	Max. ambient temperature [°C]:	45

Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct		

Photometric data

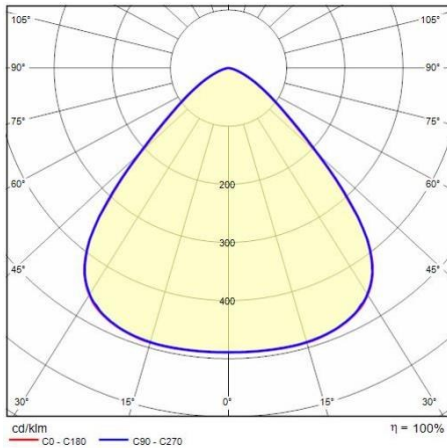

Optional accessories

A+

**3111283**

Fixing bracket A+200

■ BK-RAL9005 / Black RAL9005

A+ 100 / A+ 150 / A+ 200

**3111277**

Microwave motion sensor

**3111278**

Remote control A+

**3111279**

DALI converter

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions