



Céliane™ Opening controls


Cat. No(s): 0 676 01/02/03



0 676 01



0 676 02



0 676 03


1. USE

Control mechanisms for roller shutters, blinds and awnings.

2. RANGE

Designation	Cat. No.
Switch for roller shutters / blinds / awnings	0 676 01
Pushbutton for roller shutters / blinds / awnings	0 676 02
Pushbutton direct control for roller shutters / blinds / awnings	0 676 03

3. OVERALL DIMENSIONS (mm)

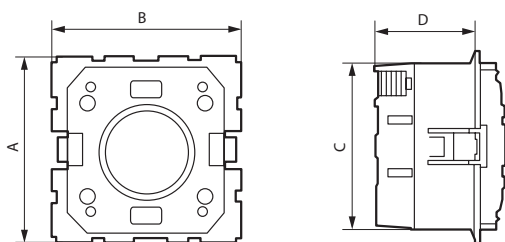


A	B	C	D
45	45	40.3	23.4


4. CONNECTION

Terminal type: automatic
Stripping: 13 mm
Terminal capacity: 2 x 2.5 mm²


■ 4.1 Pushbutton wiring (Cat. No. 0 676 02)

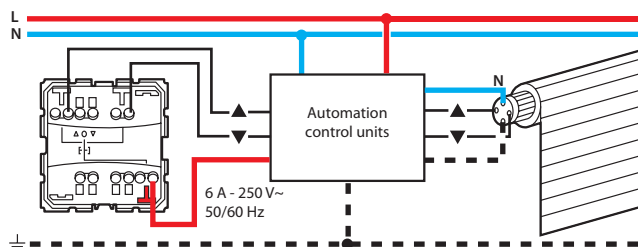

■ 4.2 Switch wiring (Cat. No. 0 676 01)

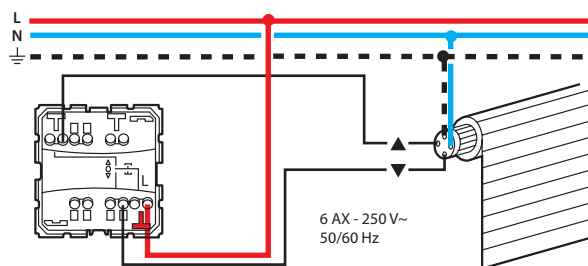


■ 4.3 Pushbutton wiring (Cat. No. 0 676 03)

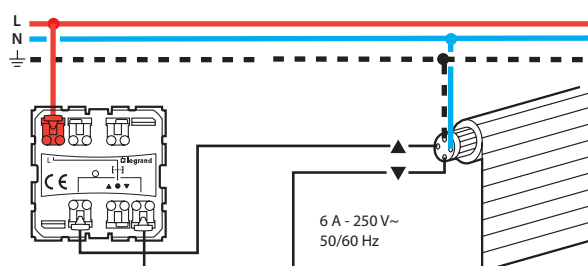

4. CONNECTION (continued)

■ 4.3 Pushbutton wiring (Cat. No. 0 676 03) with relay


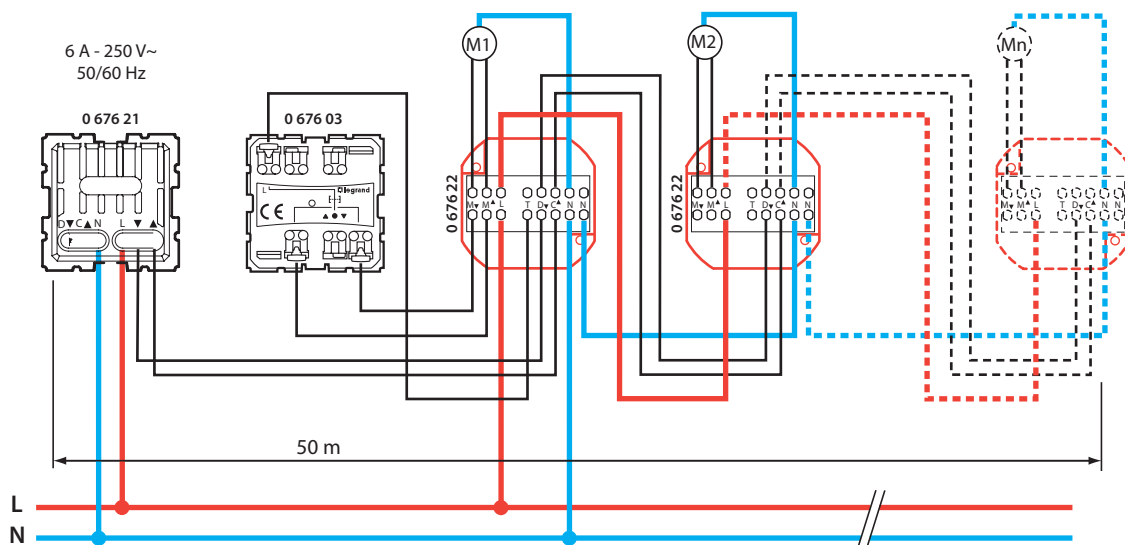


5. OPERATION

Cat. No. 0 676 01: double switch for direct control of opening drives (fixed position mechanism).

Cat. No. 0 676 02: double pushbutton for controlling one or more opening drives via automation control units (closing mechanism).

Cat. No. 0 676 03: double pushbutton for relay control (closing mechanism) of motor opening (without STOP).



6. TECHNICAL DATA

■ 6.1 Technical characteristics

Impact tests: IK 04
Penetration by solid/liquids bodies: IP 41 (C15-1000) } no rocker

■ 6.2 Material characteristics

Housing: Polycarbonate

■ 6.3 Electrical characteristics

Self-extinguishing: 650° C / 30 s

Voltage: 250 VAC

Current: 0 676 01 : 6 AX

0 676 02/03 : 6 A

Max. controlled power: 500 W

■ 6.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C

Operating temperatures: - 5° C to + 50° C

7. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

8. CONFORMITY - APPROVALS

Conform with standards of installation and manufacturing.

Refer to e.catalogue.