


Pagina de detalii a produsului

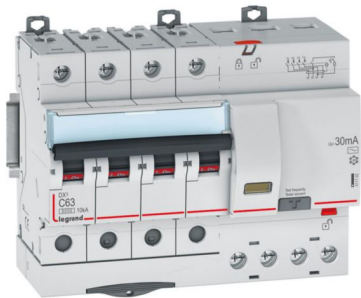

DX3 LEGRAND

RCBO - DX³ 6000 -10 kA -4P-400 V~ -63 A -30 mA - tip AC

REF. 411192 | EAN. 3245064111928

> [vizitați ecatalogul nostru](#)

Caracteristici tehnice

Number of poles (total)	4
Number of protected poles	4
Rated voltage	400 V
Rated current	63 A
Rated fault current	0.03 A
Leakage current type	AC
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	6 kA
Rated short-circuit breaking capacity according to IEC 60947-2	10 kA
Rated short-circuit breaking capacity Icn according to EN 61009-1	6 kA
Surge current capacity	0.25 kA
Voltage type	AC

Frequency	50 Hz
Release characteristic	C
Concurrently switching neutral conductor	Yes
With interlocking device	Yes
Pollution degree	2
Width in number of modular spacings	7
Built-in depth	44 mm
Anti- nuisance tripping version	No
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1-35 mm ²
Connectable conductor cross section multi-wired	1-25 mm ²

Documentație

Document tehnică

F01314EN-04.pdf | PDF (1.5Mo)

Acorduri & Certificate

NF App Domestic-NF012_4536 | (0.76Mo)

Specificații CAD & Design / BIM

411192.dwg | DWG (0.37Mo)

