


Surface-mount housing

Cylindrical surface-mount housing in classical design; 2-piece housing made of die-cast aluminium in white painted finish; upper housing section (including electrical connection) is fitted to ceiling; lower housing section designed to take PANOS infinity E200 HF/HG/HM/HL (model with white circular trim) and PANOS infinity/evolution R200 H recessed luminaires; please order luminaire separately; lower housing fitted to top section using twist-and-lock mechanism; electrical supply connection: 5-pole connector terminal with connecting cable to ballast unit; pre-wired for loop-in/loop-out; PANOS INFINITY recessed luminaires achieve IP20 degree of protection when used in combination with the surface-mount housing; dimensions: Ø235 mm, height 206 mm; weight: 2.06 kg; Note: surface-mount housing is not suitable in combination with attachment (IP54) and decorative rings or with emergency lighting versions (NT3), designed to take "tunableWhite" recessed luminaires, and luminaires with high luminaire luminous flux (50W); suspended mounting on request; figure shows: surface-mount housing with luminaire fitted.



ZS_PAI_F_A200_HF.jpg

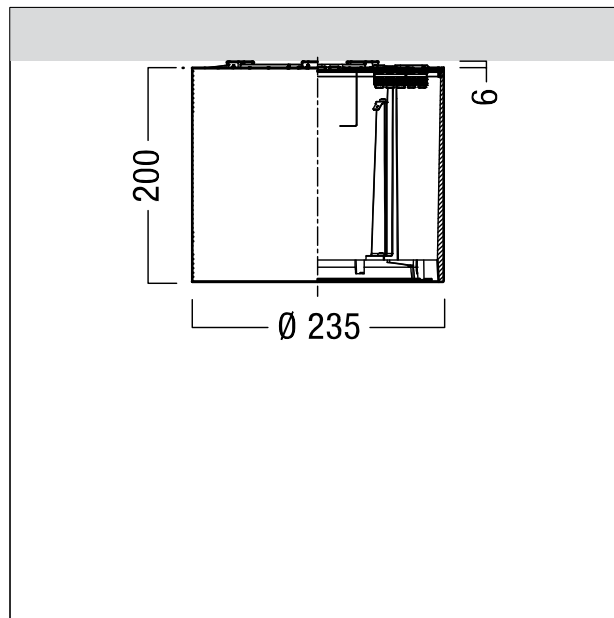

ZS_PAN_M_INF_E200H_ANB_D235.wmf