

# D-CO LED Bollard

# THORN

## 96262098 D-CO LED BOLLARD 1000 30L50 830 CL2 CON

LED 14W LED_507	IP65	IK10				EAC	T <sub>a</sub> 50	
-----------------	------	------	--	--	--	-----	-------------------	--

### D-CO LED Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class II electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 3000K LED


Dimensions: Ø150 x 1000 mm

Total power: 14 W


Weight: 5.45 kg



TLG\_DC0L\_F\_LEDBOLLARDLIT.jpg

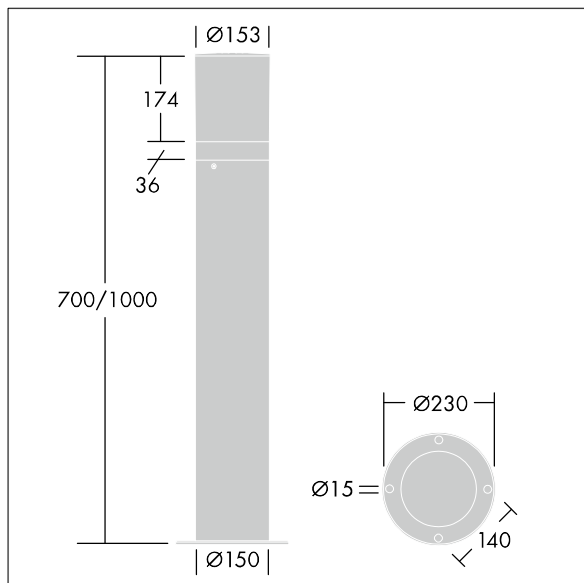

TLG\_DCOB\_M\_BOL.wmf

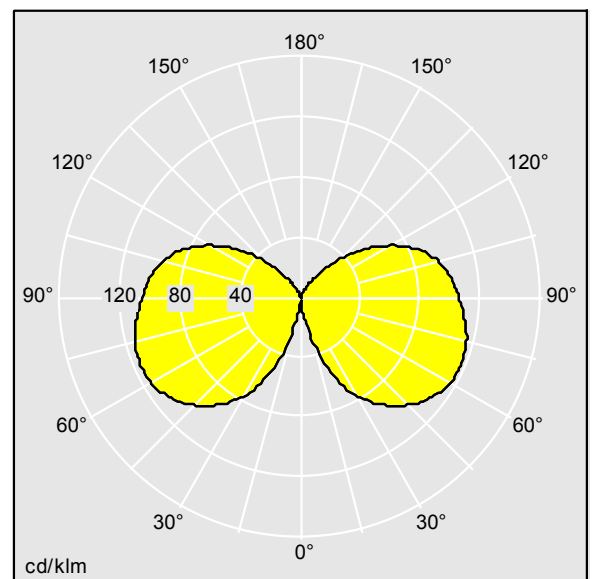

TLLA\_DCOLD3\_DC.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 507 lm  
Luminaire efficacy\*: 36 lm/W  
Lamp efficacy: 36 lm/W

Correlated colour temperature\*: 3000 Kelvin  
Ballast: 1x EL2  
Luminaire input power\*: 14 W  $\lambda = 0.97$   
Dimming: FO  
LOR: 1,00 ULOR: 0,38 DLOR: 0,62

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Colour temperature is subject to a tolerance of up to  $\pm 150$  Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting