

D-CO Bollard

THORN

96262098 D-CO LED BOLLARD 1000 30L50 830 CL2 CON

LED 14W LED_507	ISO 9223 C3	IP65	IK10								T _a 50	
-----------------	----------------	------	------	--	--	--	--	--	--	--	-------------------	--


D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class II electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Equipped with connector. Complete with 3000K LED


Dimensions: Ø150 x 1000 mm
Luminaire input power: 14 W
Weight: 5.45 kg



TLG_DCOL_F_LEDBOLLARDLIT.jpg

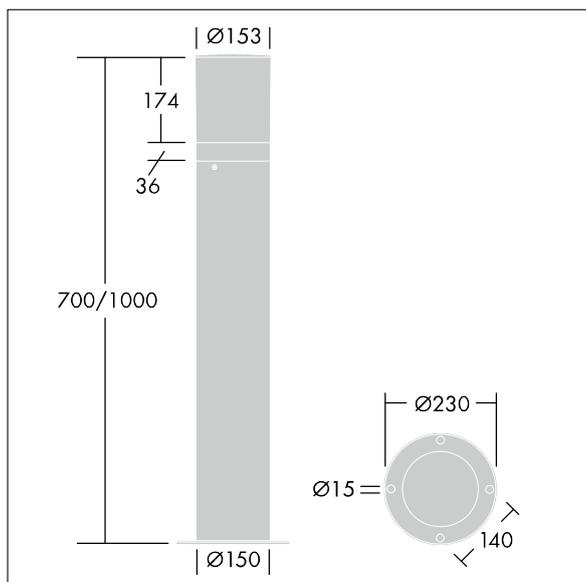

TLG_DCOB_M_BOL.wmf

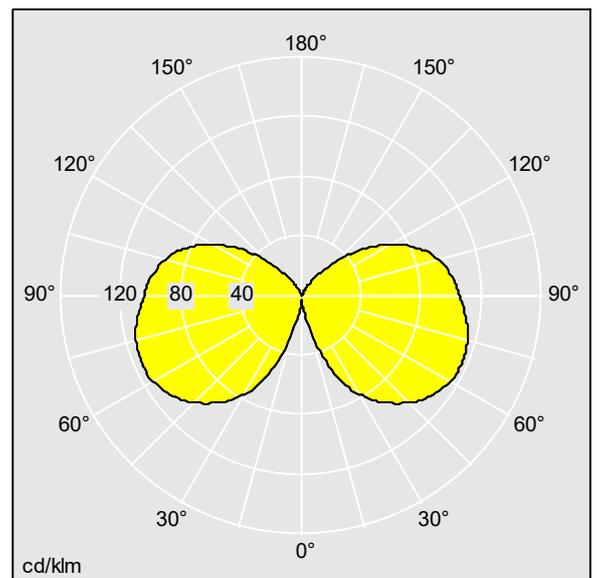

TLLA_DCOLD3_DC.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 507 lm
Luminaire efficacy*: 36 lm/W
Correlated colour temperature*: 3000 Kelvin

Rated useful life (B10)*:
L80 50000 h at 25 °C
Ballast: 1x EL2
Luminaire input power*: 14 W Power factor = 0.97
Control: FO
LOR: 1,00 ULOR: 0,38 DLOR: 0,62

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting