SLV GmbH

BETRIEBSANLEITUNG FÜR WAND- UND DECKENLEUCHTE

OPERATING MANUAL FOR WALL- AND CEILING FITTING

MODE D'EMPLOI POUR APPLIQUE / PLAFONNIER

INSTRUCCIONES DE SERVICIO PARA LUMINARIA PARED / TECHO

ISTRUZIONI DI FUNZIONAMENTO PER LAMPADA DA PARETE / SOFFITTO

GEBRUIKSHANDLEIDING VOOR WAND- EN PLAFONDLAMP

INSTRUKTIONSVEJLEDNING FOR VÆGBELYSNING / LOFTBELYSNING

INSTRUKCJA OBSŁUGI DLA LAMPA ŚCIENNA I SUFITOWA

РУКОВОДСТВО ПО ЭКСПЛУАТАЦИИ НАСТЕННЫЙ И ПОТОЛОЧНЫЙ СВЕТИЛЬНИК


BRUKSANVISNING FÖR VÄGG- OCH TAKLAMPA


DUVAR VE TAVAN LAMBASI IÇIN KULLANMA KILAVUZU

KEZELÉSI ÚTMUTATÓ FALI- ÉS MENNYEZETI LÁMPATEST



1000886/ 1000887 / 1000888 1000889 / 1000890 / 1000891 1000892 / 1000893 / 1000894 1000895 / 1000896 / 1000897



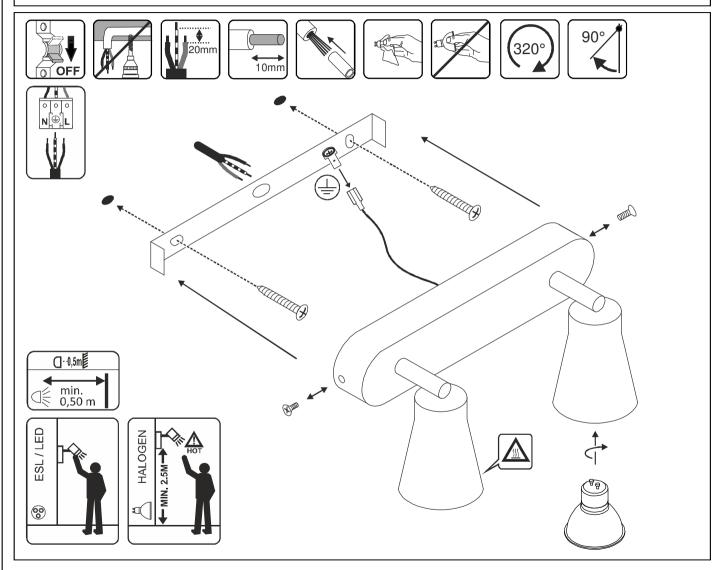

art.-no. 1000886 / 1000887 / 1000888 / 1000889 / 1000890 / 1000890 / 1000891 / 1000892 / 1000893 / 1000895 / 1000896 / 1000896 / 1000897 15.12.2017 © SLV GmbH, Daimlerstr. 21-23, 52531 Übach-Palenberg, Germany, Tel. +49 (0)2451 4833-0 Technische Änderungen vorbehalten. Technical Details are subject to change. Les détails techniques sont sujet à des changements. Nos reservamos el derecho a modificaciones técnicas. Modifiche tecniche riservate. Behoudens technische wijzigingen. Ret til tekniske ændringer forbeholdes. Zmiany technizzne zastrzeżone. Сохраняется право на внесение технических изменений. Tekniska ändringar kan förekomma. Teknik desjisklik yapma hakkı saklıdır. A technikai részletek termékenkent változhatnak. Made in China.

ENGLISH

OPERATING MANUAL FOR WALL- AND CEILING FITTING 1000886 / 1000887 / 1000888 / 1000889 / 1000890 / 1000891 / 1000892 / 1000893 / 1000894 / 1000895 / 1000896 /1000897

Read this short manual carefully and keep it accessible for further reference!



Disregard of the safety messages may lead to danger of life, burning or

- Installation, mounting or works on the electrical connection may only be carried out by an approved electrician.
- The product may not be modified or converted.
- Do not hang or fasten anything on the product, especially no decoration.
- Do not cover the product provide free air circulation.
- There may be hot surfaces on the luminaire. These surfaces are indicated

on the drawing or on the luminaire by the following sign: \angle

• In case of a malfunction you may NOT touch the product or operate it further. Disconnect the product from the power supply by an external switch or by the fuse.

A malfunction exists when:

- visible damages appear.
- the product does not work properly (e.g. flickering).
- · smoke, steam or crackling sounds appear.
- smell of burning is recognisable.
- an overheating is recognisable (e.g. by discolouration of adjacent surfaces).

Operate the product only after maintenance and examination by an approved electrician!

• This product is not intended to be used by children. Ensure that children do not suffer any harm e.g. by burns from hot surfaces or by electrical shock.

Additional safety messages are indicated by this symbol: 4

USE AS DIRECTED

This product serves exclusively lighting purposes and may:

- only be used with a voltage of 230V ~50Hz.
- only be installed according to safety class I (one).
- only be operated when firmly mounted on a stable, even and tilt-fixed surface.
- only be operated on normally or not flammable surfaces.
- · only be used in dry condition,
 - not in damp or dirt-endangered rooms.
 - · not in areas of high air humidity.
- not be exposed to strong mechanical loads or to strong contamination.

OPERATION

riangle The distance between the light source and the illuminated surface must be at least **0.5 m**. Pay special caution to easily inflammable objects (e.g. curtains, fabrics, foliage, etc.).

MAINTENANCE AND CARE

Light source

A Exchange the light source always before it reaches its lifespan, to avoid personal injuries, or damages of the luminaire or other objects.

Tisconnect the product from the power supply, before you exchange the light source. Let the light source cool down before replacement.

⚠ Use only light sources that are suitable for the product. Suitable light sources are indicated on the type label.

- Suitable light sources: QPAR51, GU10, 50W max.
- · Replacing the light source see figure.

Care

A Disconnect the product from the power supply and let it cool down, before you clean the product.


· Clean the product on a regular basis using a slightly moistened, soft and flufffree cloth. Please also note additional supplied notes on maintanance and

STORAGE AND DISPOSAL

• The product must be stored in a dry and clean environment. Do not strain the product mechanically during storage.

After a damp or soiling storage the product may only be installed after checking its condition by an approved electrician.

Disposal (European Union)



INSTALLATION (only by an approved electrician)

Switch off the mains or respectively the connection lead before doing any

Use only parts, which are supplied with the product or are described as

Inspect the product for loose parts inside the housing. When there are loose parts inside the housing and these are not explicitly described the product may not be installed or operated.

Use the supplied fastening material only when it is suited for the installation background. If this is not the case use only fastening material suiting the installation background.

Unpacking

- Carefully take the product out of the packaging removing any transport safeguards.
- Before disposal of the packaging material make sure that all components of the product are removed.

Installation place

- The product is solely suited for installation on the wall and ceiling.
- The surface of the luminaire may get very hot depending on the utilized light source. When using halogen light sources the luminaire may only be installed and operated in a minimum height of 2.50m, outside of the arm's
- Note the security advice on the distance to the illuminated surface in the chapter OPERATION.

Installation steps (read completely before installation)

- Install the luminaire as shown in the figure.
- Electrical Connection
 - The product must be able to be separated by an all pole separation from the current supply.
- For electric connection attach the black or brown wire (live conductor) of the connection lead with the clamp L and the blue wire (neutral conductor) of the connection lead with the clamp N. The green-yellow wire (protective conductor) of the connection lead has to be tightly

connected with the earth clamp of the product.

M Check if the product functions properly and is securely fixed!

art.-no. 1000886 / 1000887 / 1000888 / 1000889 / 1000890 / 1000891 / 1000892 / 1000893 / 1000894 / 1000895 / 1000896 /1000897 © 15.12.2017 SLV GmbH.

Daimlerstr. 21-23, 52531 Übach-Palenberg, Germany, Tel. +49 (0)2451 4833-0

Technical Details are subject to change.