






## • FASTO

LED downlight made of aluminum in white or black. Equipped with a clear shield, an optical lens 22°, 36° or 60° and 9W Bridgelux LED or dim to warm LED 6W. Driver must be ordered separately. IP54.



Description	∧	white	black
9W LED 676lm 927	22°	420A09022	420A09122
9W LED 703lm 930	22°	420B09022	420B09122
9W LED 880lm 840	22°	420D09022	420D09122
6W LED 600lm 2000-2800K*	22°	420E06022	420E06122
9W LED 676lm 927	36°	420A09036	420A09136
9W LED 703lm 930	36°	420B09036	420B09136
9W LED 880lm 840	36°	420D09036	420D09136
6W LED 600lm 2000-2800K*	36°	420E06036	420E06136
9W LED 676lm 927	60°	420A09060	420A09160
9W LED 703lm 930	60°	420B09060	420B09160
9W LED 880lm 840	60°	420D09060	420D09160
6W LED 600lm 2000-2800K*	60°	420E06060	420E06160

Description	article no.
Osram driver primarily dimmable 18W	4052899105362
Osram driver DALI dimmable 15W	4052899324879

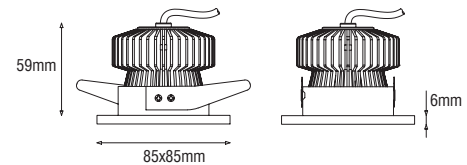

\*Always apply dim to warm in combination with DALI driver.